



PRODUCT CATALOGUE

www.ecocold.com.tr

Corporate Values



Low CO2 emission
Ecological Product
Sustainability



Innovative Solutions
Digitalisation
Connectivity



Customer Satisfaction
Customer-Oriented Quality
Customer Value Offer



High Quality
Highly Productivity
Highly Flexibility

History

- 2003** ● ND Group was founded.
- 2012** ● Ecocold was founded.
- 2015** ● A factory in Izmir was jointly established with the Italian Mondial Group.
- 2016** ● Mondial Turkey Facility was taken over and manufacturing moved to Manisa.
- 2017** ● ND Group invested in all shares of the Ecocold factory.
- 2018** ● New factory investment of Ecocold.
- 2019** ● New logistics center of Ecocold was activated.



Ecocold, the foundation of which was laid in 2012 as the Turkish operation of the Italian Mondial Framec Group, carried out its manufacture to Manisa in 2016. It was fully incorporated into the ND group of companies which is domestic capital. Ecocold has attained a place in the commercial refrigerator market as a result of the combination of Italian design/technology and the experience of the ND Group and has prioritized the quality criteria and is aware that its products are a marketing instrument and the importance of visuality. Ecocold manufactures in accordance with European norms in the commercial refrigeration sector and has international valid quality management system certifications. Ecocold products not only make all the difference in the presenting of your products with the visual quality, but also provide an advantage of high efficiency and low energy consumption. Ecocold exports horizontal type frozen storage cabinets or vertical type display coolers to more than 40 countries; this is why, as a solution partner, we stand out from rival companies by adding value to our customers in both the retail and FMCG sectors. Our goal is to provide our customers with excellent quality, stylish, efficient, economical and eco-friendly products.

Ecocold, a fresh future for you...

 APPLE



Series



- ◀ *It maximizes heat transfer with D Form aluminium pipe winding.*
- ◀ *It provides excellent insulation with 71mm high-intensity polyurethane.*
- ◀ *It does not require maintenance thanks to dust-proof condenser.*
- ◀ *With its aluminium frame and electrostatic powder-painted and galvanized-coated inner and outer body, it is long-lasting.*
- ◀ *Apple Series provides minimum energy consumption with its negative (static), positive (dynamic) or dual regime options and large volume.*
- ◀ *Apple is suitable for installation types as single-block and square-type.*
- ◀ *It allows you to organize different layouts in the Market.*






ENERGY SAVER,
EASY TO INSTALL,
RELIABLE ISLAND
FREEZER SERIES
APPLE

APPLE 188



Capacity Gross / Net (L)	870 L / 643 L / PT: 608 L
Outer Dimensions (WxDxH) mm	1881*932*900 mm
Internal Dimensions (WxDxH) mm	1730*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

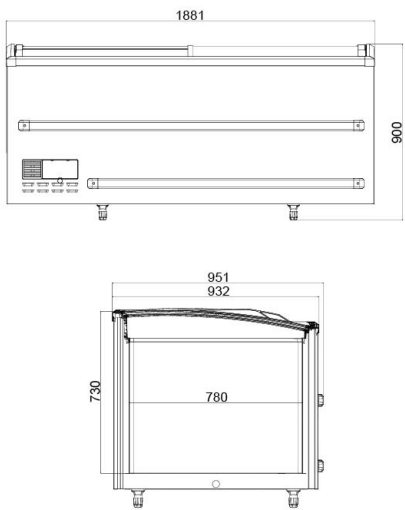

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

APPLE 212



Capacity Gross / Net (L)	1005 L / 745 L / PT: 710 L
Outer Dimensions (WxDxH) mm	2126*932*900 mm
Internal Dimensions (WxDxH) mm	1976*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

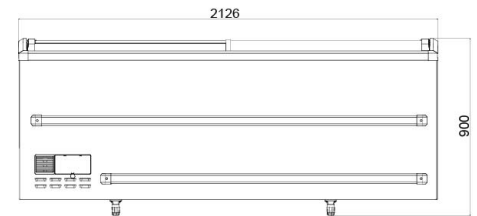

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE 250



Capacity Gross / Net (L)	1216 L / 905 L / PT: 870 L
Outer Dimensions (WxDxH) mm	2510*932*900 mm
Internal Dimensions (WxDxH) mm	2360*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 22 / 30

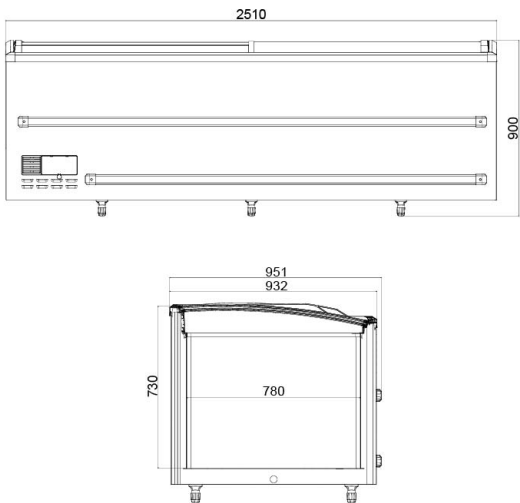

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE HEAD (200)



Capacity Gross / Net (L)	865 L / 620 L / PT: 585 L
Outer Dimensions (WxDxH) mm	2010*932*900 mm
Internal Dimensions (WxDxH) mm	1860*780*677 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

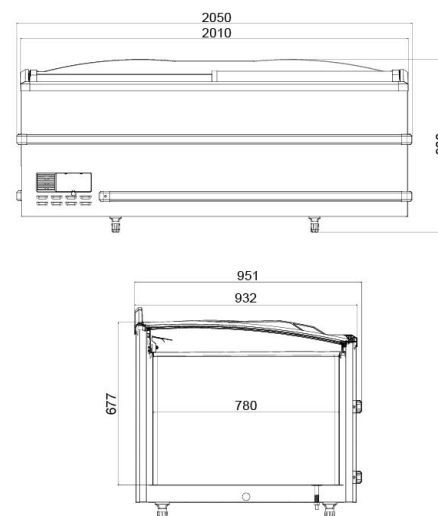

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE FG 188



Capacity Gross / Net (L)	870 L / 470 L / PT: 435 L
Outer Dimensions (WxDxH) mm	1881*932*900 mm
Internal Dimensions (WxDxH) mm	1730*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

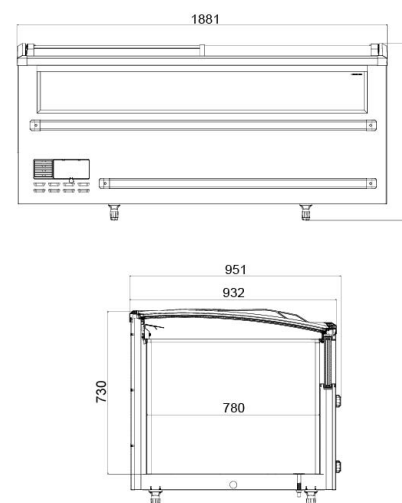

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE FG 212



Capacity Gross / Net (L)	1005 L / 560 L / PT: 525 L
Outer Dimensions (WxDxH) mm	2126*932*900 mm
Internal Dimensions (WxDxH) mm	1976*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

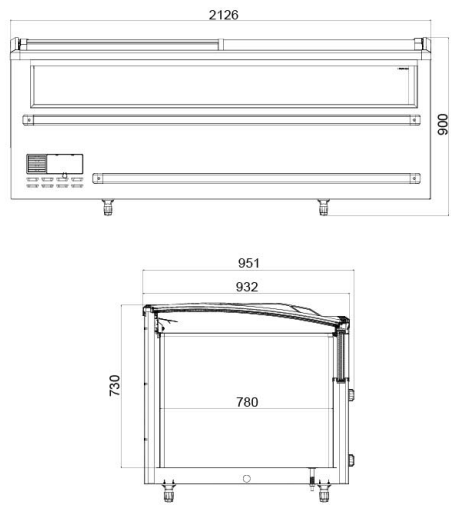

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE FG 250



Capacity Gross / Net (L)	1216L / 670 L PT: 635 L
Outer Dimensions (WxDxH) mm	2510*932*900 mm
Internal Dimensions (WxDxH) mm	2360*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas Resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 22 / 30

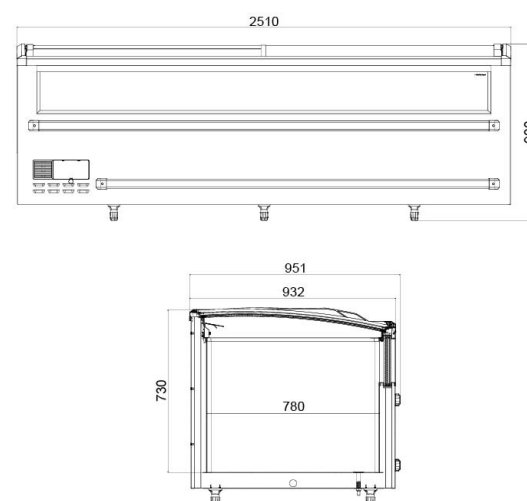

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

APPLE FG HEAD (200)



Capacity Gross / Net (L)	865 L / 511 L / PT: 476 L
Outer Dimensions (WxDxH) mm	2010*932*900 mm
Internal Dimensions (WxDxH) mm	1860*780*677 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

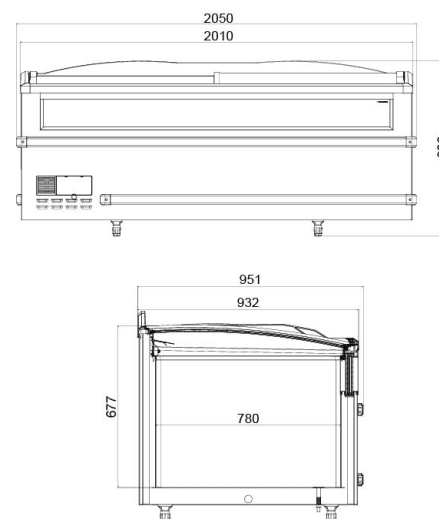

Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and
For More Details

🍊 ORANGE



Series



- ◀ *It offers minimum consumption with an inverter compressor option.*
- ◀ *No-Frost cabinet with hot gas automatic defrost system.*
- ◀ *It provides maximum efficiency by performing the defrosting process with hot gas in the system.*
- ◀ *Available in negative and dual mode regimes.*
- ◀ *It provides the opportunity to create different layouts with single-block and island-type options.*



Frozen Fo

Food

2911


oods

ORANGE SERIES COMBINING
INNOVATIVE DESIGN AND
ENVIRONMENTALLY FRIENDLY
NO-FROST TECHNOLOGY

ORANGE 188



Capacity Gross / Net (L)	980 L / 756 L / PT: 721 L
Outer Dimensions (WxDxH) mm	1881*932*950 mm
Internal Dimensions (WxDxH) mm	1730*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

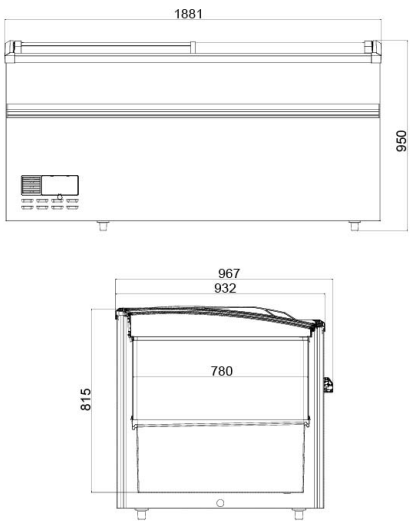

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castor (4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE 212



Capacity Gross / Net (L)	1123 L / 870 L / PT: 835 L
Outer Dimensions (WxDxH) mm	2126*932*950 mm
Internal Dimensions (WxDxH) mm	1976*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

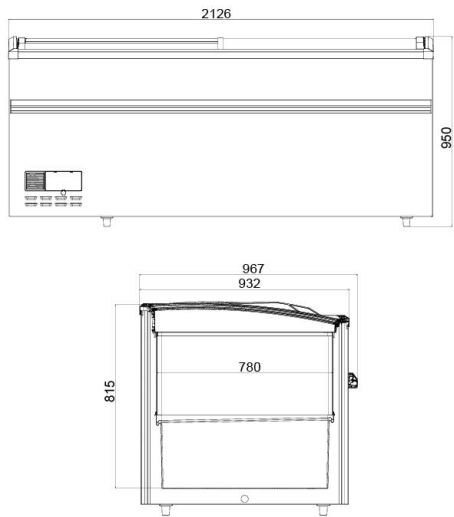

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castor (4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE 250



Capacity Gross / Net (L)	1351 L / 1058 L PT: 1023 L
Outer Dimensions (WxDxH) mm	2510*932*950 mm
Internal Dimensions (WxDxH) mm	2360*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 16 / 20

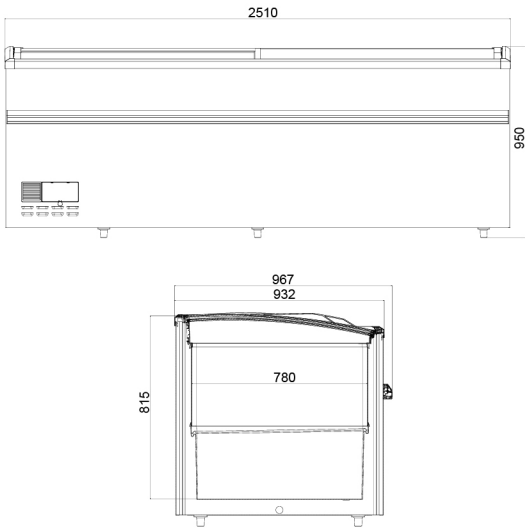

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (6 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE HEAD



Capacity Gross / Net (L)	980 L / 740 L PT:705 L
Outer Dimensions (WxDxH) mm	2010*932*950 mm
Internal Dimensions (WxDxH) mm	1860*780*762 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

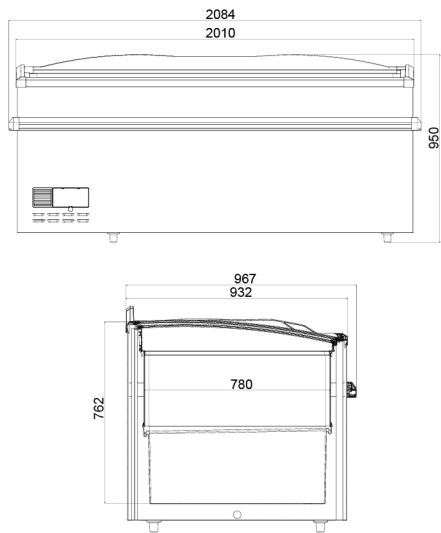

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE FG 188



Capacity Gross / Net (L)	986 L / 633 L PT:598 L
Outer Dimensions (WxDxH) mm	1881*932*950 mm
Internal Dimensions (WxDxH) mm	1730*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free / Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

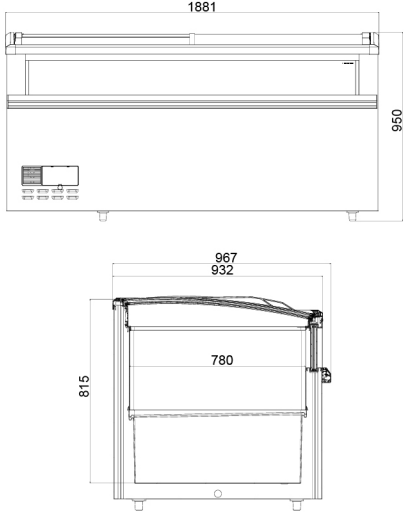

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE FG 212



Capacity Gross / Net (L)	1130 L / 730 L PT:695 L
Outer Dimensions (WxDxH) mm	2126*932*950 mm
Internal Dimensions (WxDxH) mm	1976*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

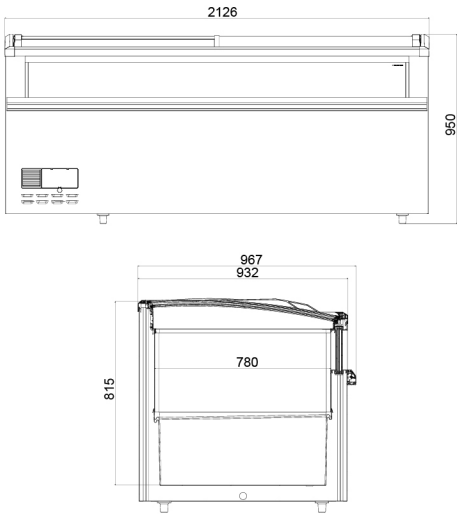

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE FG 250



Capacity Gross / Net (L)	1360 L / 891 L PT: 856 L
Outer Dimensions (WxDxH) mm	2510*932*950 mm
Internal Dimensions (WxDxH) mm	2360*780*815 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 16 / 20

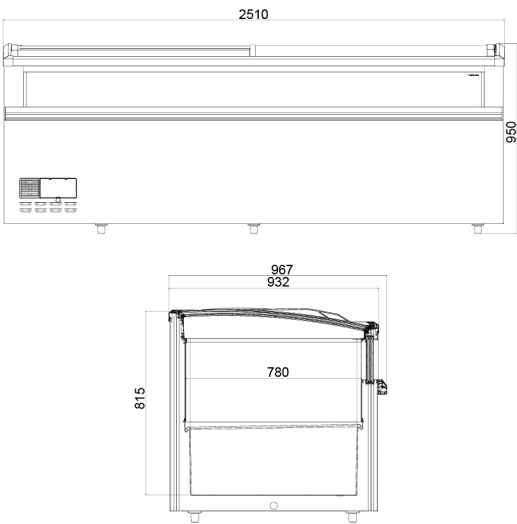

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (6 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

ORANGE FG HEAD



Capacity Gross / Net (L)	983 L / 685 L / PT: 650 L
Outer Dimensions (WxDxH) mm	2010*932*950 mm
Internal Dimensions (WxDxH) mm	1860*780*762 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

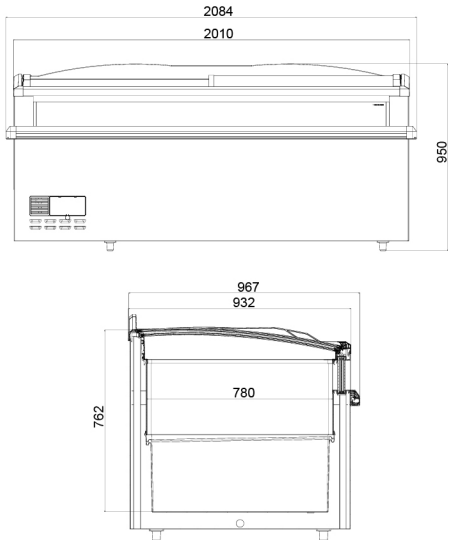

Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors (4 Pcs)
- Island middle sheet price holder


Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and
For More Details

OPTIONS


Price Label

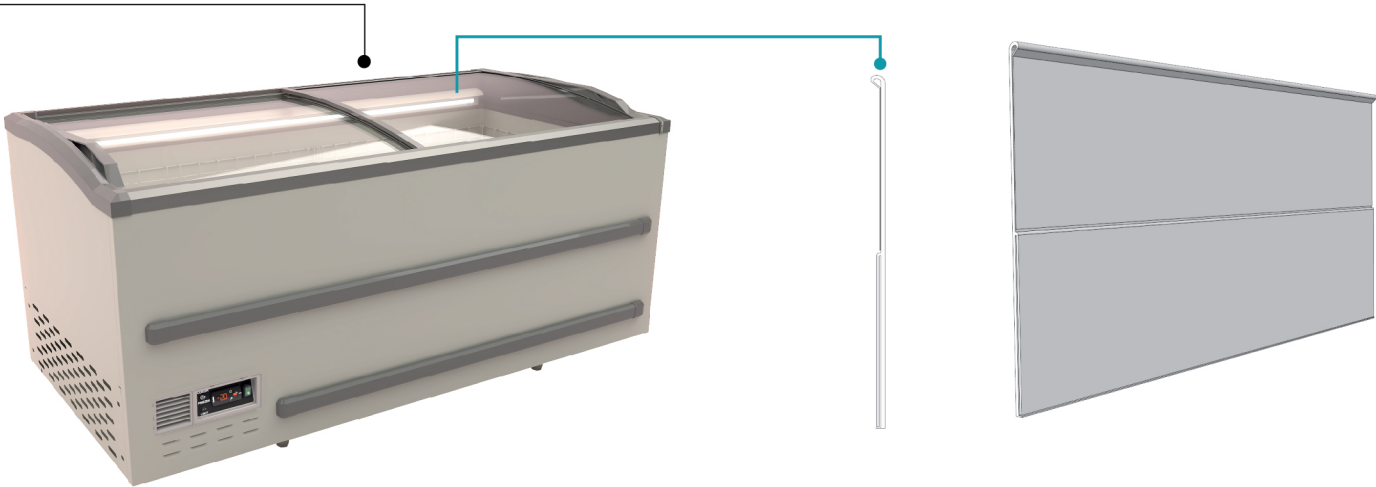


Kickplate

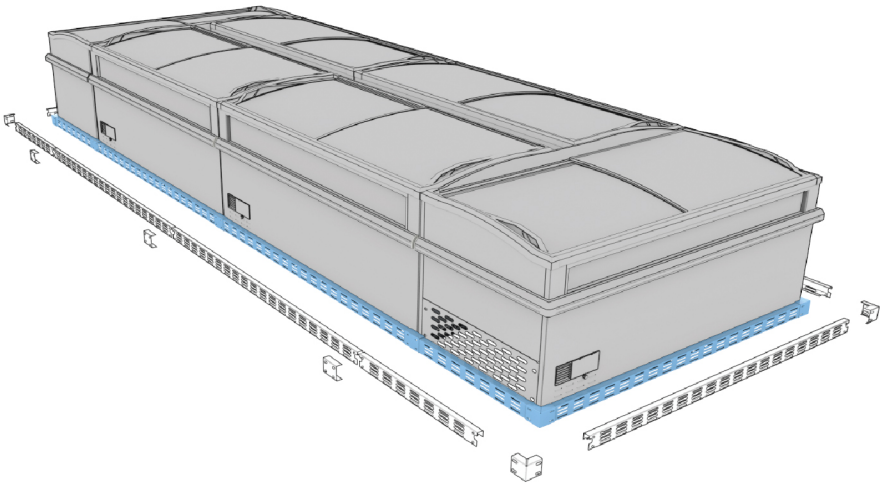


Standard Shelf System

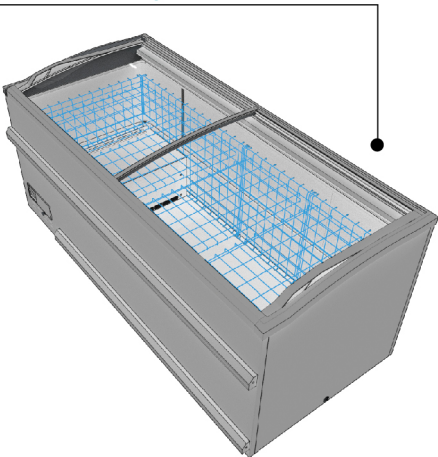

Standard Shelf System with separator

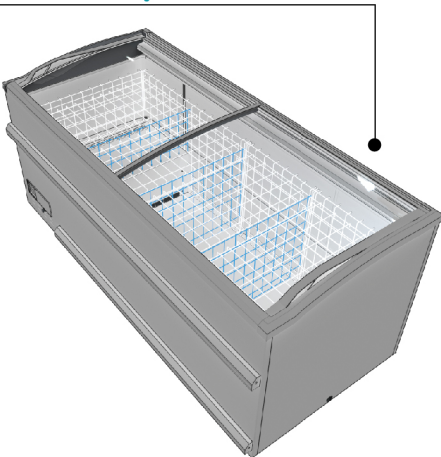


Basket System

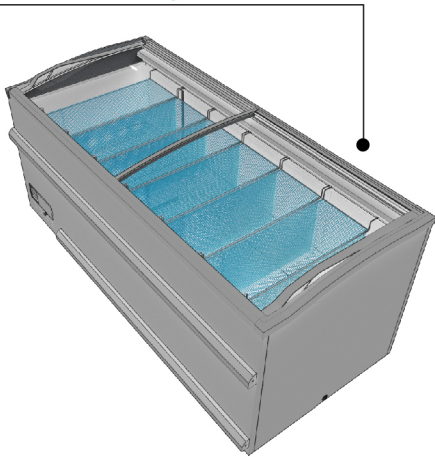


MODULE	BASCKET QTY
188 / 188 FG	6 PCS
212 / 212 FG	6 PCS
250 / 250 FG	8 PCS
APPLE HEAD	7 PCS
ORANGE HEAD	6 PCS

OPTIONS

Island Middle Shelf

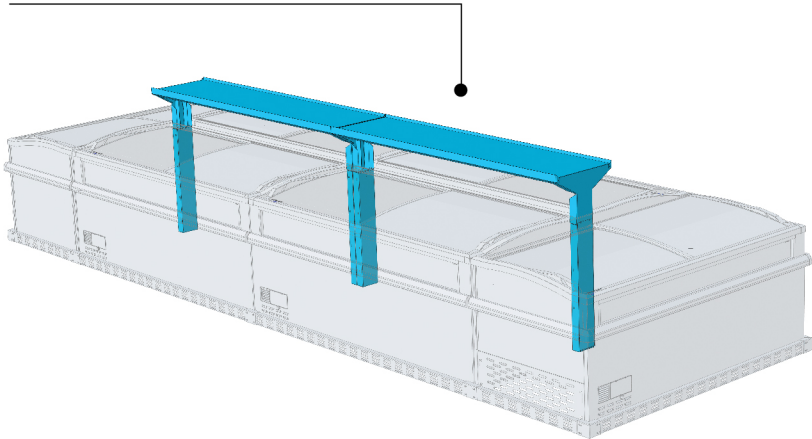


Island Middle Price Holder

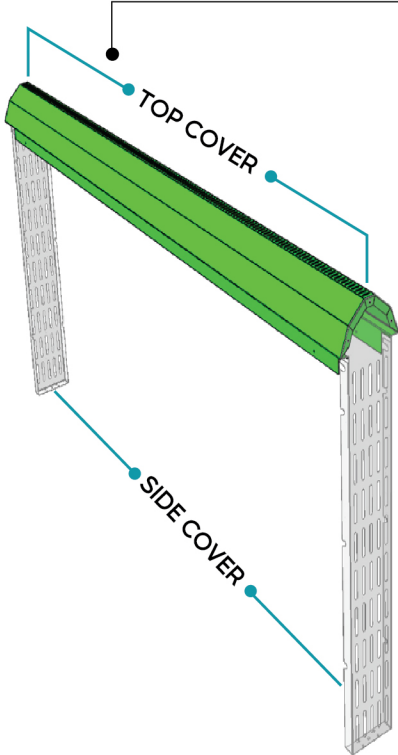

Castor Options



LEGS

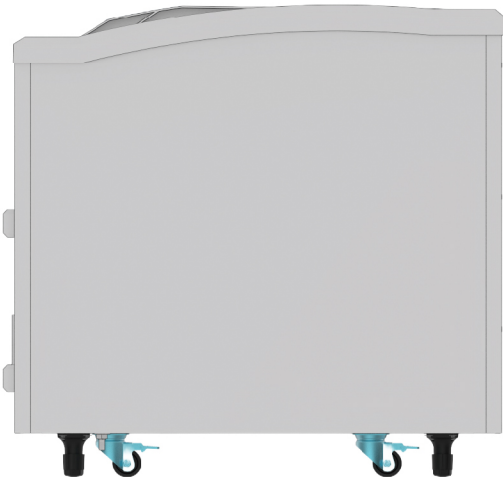

LEGS + CASTOR

MODULE	CASTOR & LEGS
188 / 188 FG	4 PCS / 4 PCS
212 / 212 FG	4 PCS / 4 PCS
250 / 250 FG	6 PCS / 6 PCS
APPLE HEAD	4 PCS / 4 PCS
ORANGE HEAD	4 PCS / 4 PCS



CITRUS



Series



- ◀ *Perfect solution for top-freezer saves from your space & energy and also citrus is adaptable to all kind of chest freezers in your stores.*
- ◀ *It provides you a low energy consumption thanks to its automatic defrost.*
- ◀ *Citrus enables you to display your product as a stand-alone or an island.*







CITRUS SERIES
SAVES FROM YOUR
SPACE AND ENERGY

CITRUS 212



Capacity Gross / Net (L)	865 L / 825 L
Outer Dimensions (WxDxH) mm	2121 X 950 X 2476 mm
Internal Dimensions (WxDxH) mm	2000 x 458 x 974 mm
Temperature Range (°C)	NT: -18 / -23 ; PT: -1 / +5
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame & FRAMELESS
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Triple Tempered
Evaporator Type	Fin Type +Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	Horizontal led + on/off button
Insulation	61 mm
Adjustable Leg	-
20DC/40DC/40HC/Truck	5 / 12 / 12 / 13

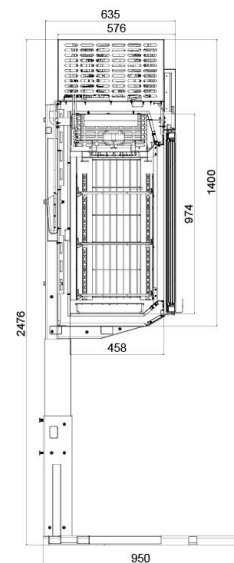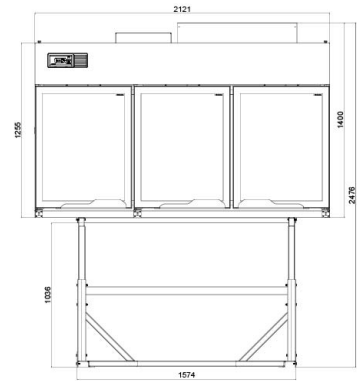

Options

- Price Label
- Branding / Sticker
- Door Lock
- Lighting from door

Inner Body	Outer Body
STANDARD	OPTIONAL
RAL 9002	RAL 9005





Energy Class and
For More Details

CITRUS 250



Capacity Gross / Net (L)	1030 L / 990 L
Outer Dimensions (WxDxH) mm	2506 x 950 x 2476 mm
Internal Dimensions (WxDxH) mm	2384 x 458 x 974 mm
Temperature Range (°C)	NT: -18 / -23 ; PT: -1 / +5
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&FRAMELESS
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	Fin Type +Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	Horizonatal led + on/off button
Insulation	61 mm
Adjustable Leg	-
20DC/40DC/40HC/Truck	4 / 8 / 8 / 10

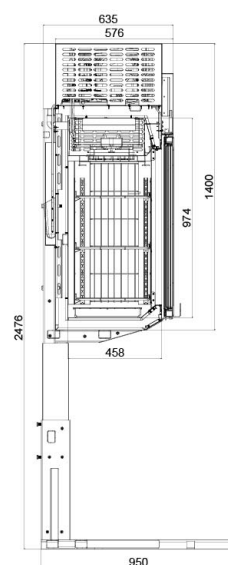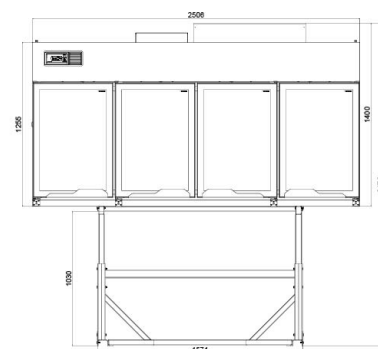

Options

- Price Label
- Branding / Sticker
- Door Lock
- Lighting from door

Inner Body	Outer Body
STANDARD RAL 9002	OPTIONAL RAL 9005



Energy Class and
For More Details



Series



- ◀ *Frameless & full door smart design which provides large volume and very low energy consumption. Kiwi series is a game changer which offers high flexibility and huge savings.*
- ◀ *It provides a large internal volume with a depth of 74 cm.*
- ◀ *Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.*
- ◀ *It is a remarkable and stylish product with frameless glass, LED illumination and different color options.*
- ◀ *It looks like a single cabinet by positioning side by side.*
- ◀ *It provides maximum performance & minimum energy consumption with high insulation, Low E coated and argon gas-filled glass.*
- ◀ *It provides a number of placement opportunities with various size options of doors for both chiller and freezer versions.*



LOW
PRICE
25⁹⁹
19
FULL SET


UNIQUE ENGINEERING
DEVELOPING ITSELF
CONTINUOUSLY
KIWI



KIWI 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	630x795x2082
Internal Dimensions (WxDxH) mm	544x637x1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	26 / 46 / 56

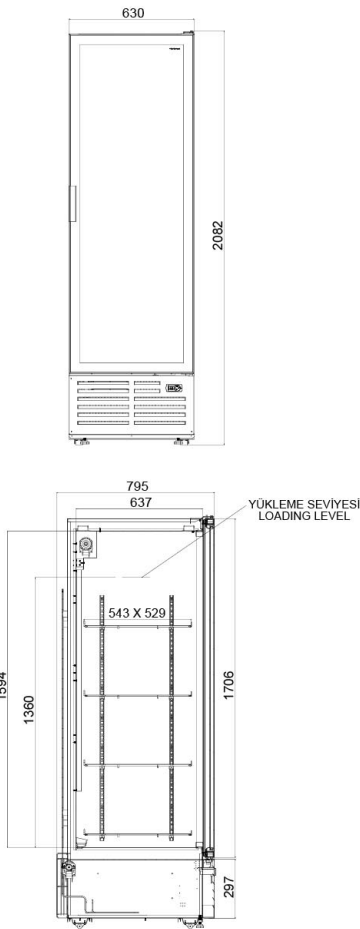

Options

- Door lock
- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805X748X2082
Internal Dimensions (WxDxH) mm	719X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Var
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

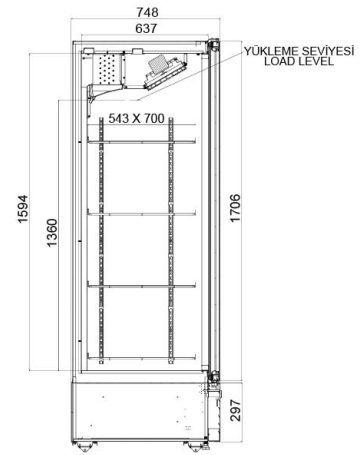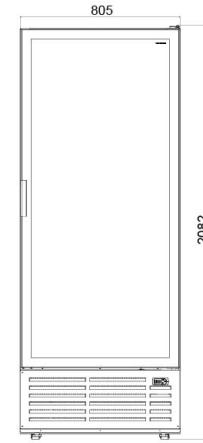

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270X748X2082
Internal Dimensions (WxDxH) mm	1184X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

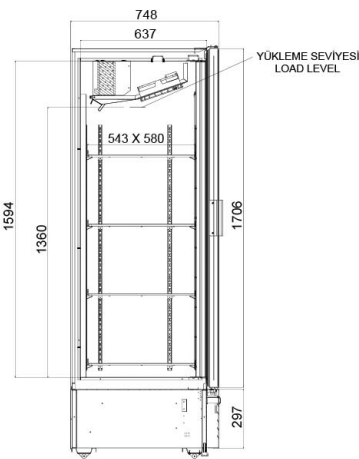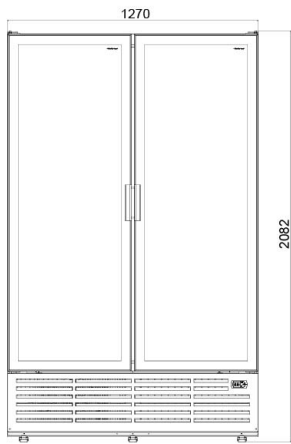

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

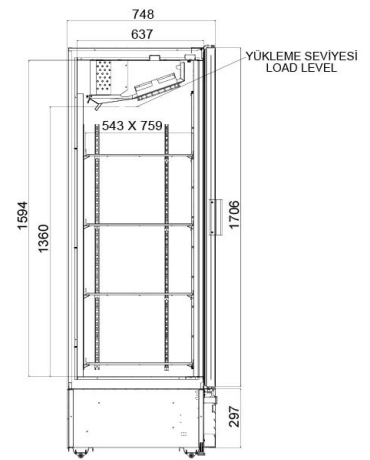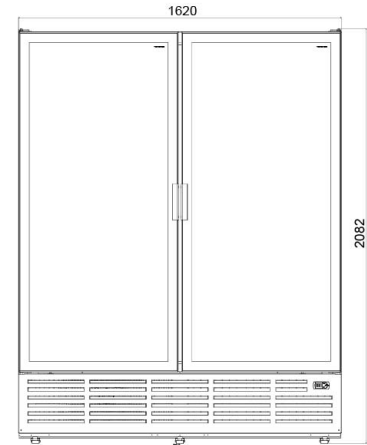

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

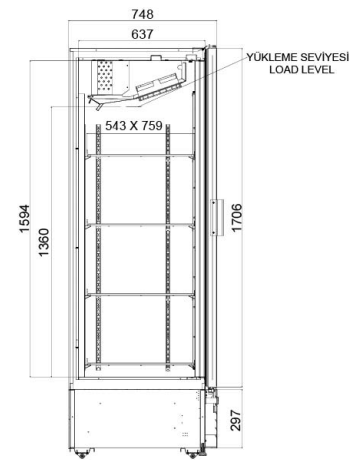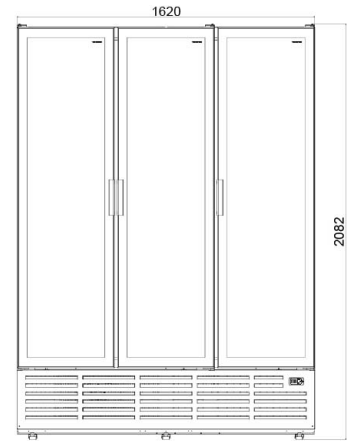

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 1910 3D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910X748X2082
Internal Dimensions (WxDxH) mm	1824X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

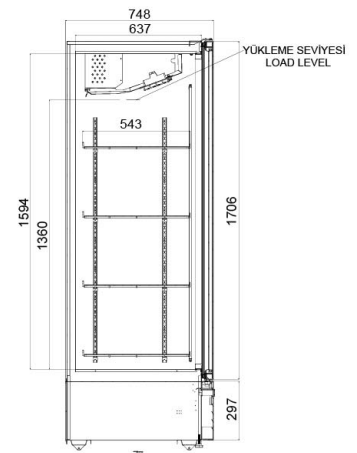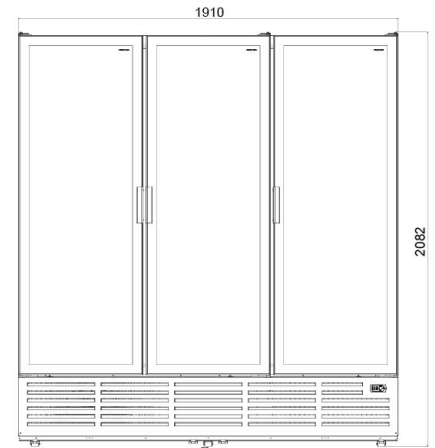

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI 1910 4D



Capacity Gross / Net (L)	1850 L / 1630L
Outer Dimensions (WxDxH) mm	1910X748X2082
Internal Dimensions (WxDxH) mm	1824X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

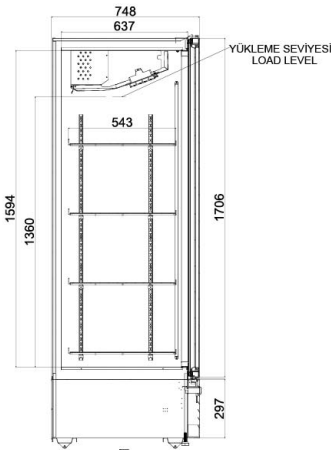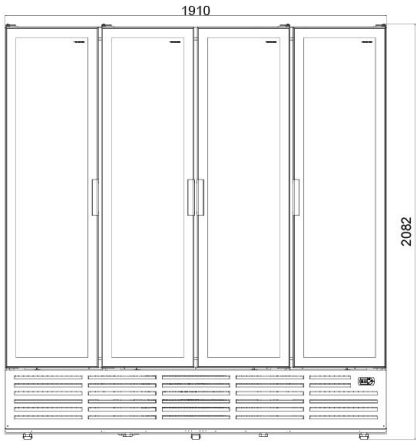

Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI NT 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666 x 804 x 2082 mm
Internal Dimensions (WxDxH) mm	544 x 637 x 1594 mm
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42/ 51

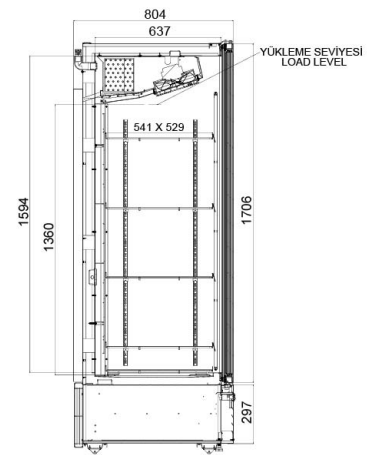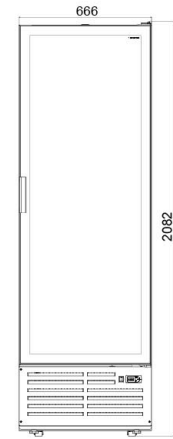

Options

- Door lock
- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI NT 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082 mm
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594 mm
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 x4 / PE coated
Adjustable Feet / Roller	2x adjustable feet +4x Roller
20DC/40DC-HC/Truck	11 / 22 / 26

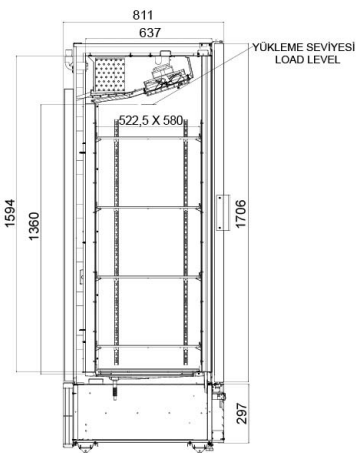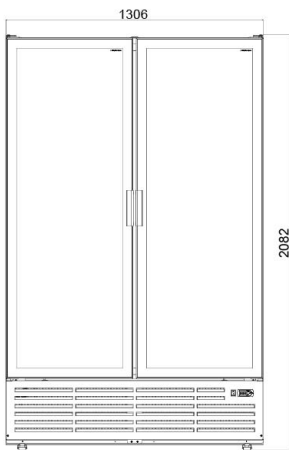

Options

- Door lock
- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and
For More Details



*CREATES A PERFECT DISPLAY POINT
BY HIGHLIGHTING
THE PRODUCTS WITH
THE FLAWLESS
AESTHETIC DESIGN*
KIWI SERIES

 **KIWI M&D**



Series



- ◀ *It provides a quality view with ergonomic door handle.*
- ◀ *Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.*
- ◀ *This series, developed for supermarkets, achieves 3MO operating conditions using an evaporator with automatic defrost, and with NT version Kiwi M&D series offer full range as chiller & freezer cabinets.*
- ◀ *Low energy consumption thanks to hot gas defrost system.*
- ◀ *It looks like a single cabinet by positioning side by side.*
- ◀ *It is suitable for various placement combinations with its different sizes for both chiller and freezer versions.*




Real Butchers
IN THE HOUSE

10 YEARS
OF
EXPERIENCE





DESIGN CREATED BY COMBINING
DURABLENESS AND AESTHETIC
KIWI MD

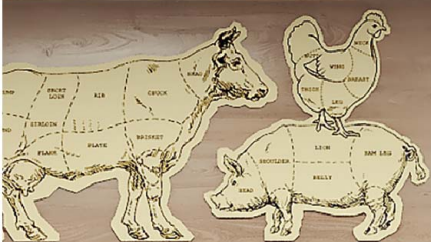

KIWI M&D 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	630x795x2082
Internal Dimensions (WxDxH) mm	544x637x1594
Temperature Range (°C)	0°C/+2°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminim sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	26 / 46 / 56

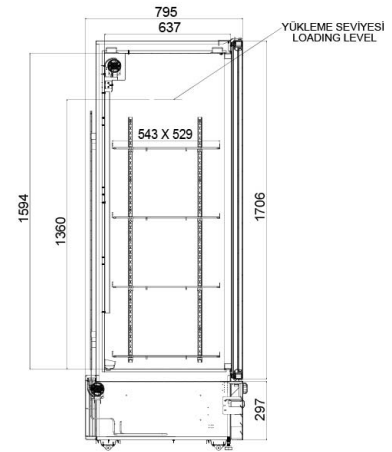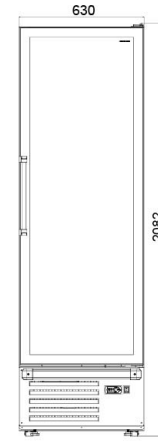

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL




Energy Class and
For More Details

KIWI M&D 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805X748X2082
Internal Dimensions (WxDxH) mm	719X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminum sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

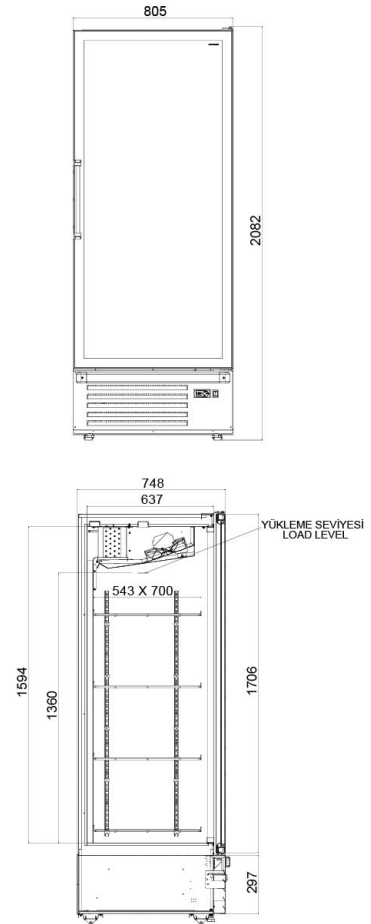

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI M&D 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270X748X2082
Internal Dimensions (WxDxH) mm	1184X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

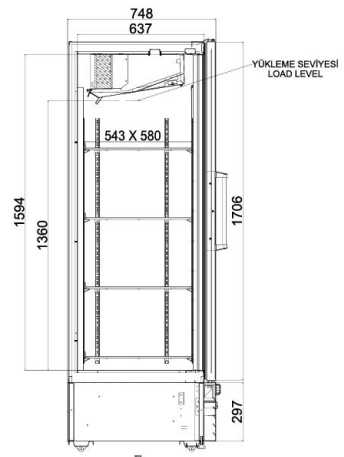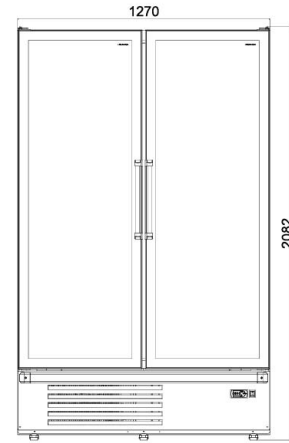

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI M&D 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

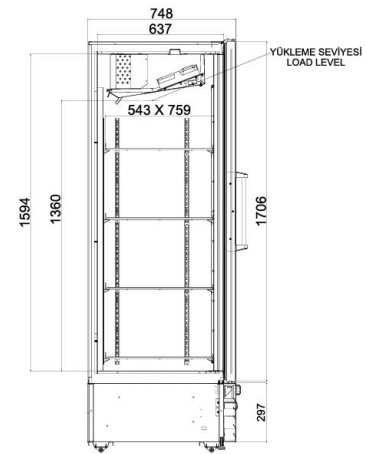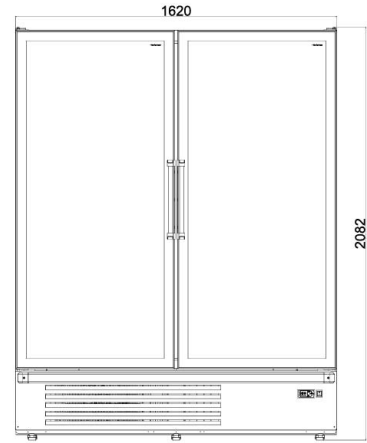

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI M&D 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

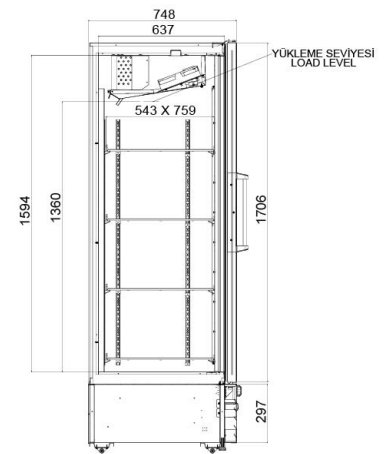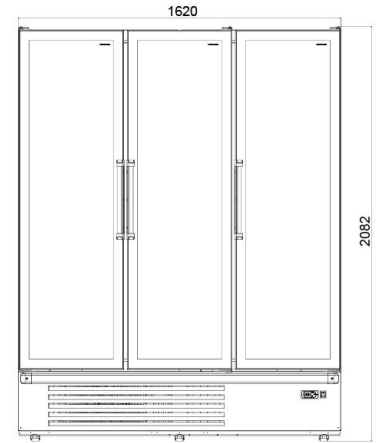

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI M&D 1910 3D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910X748X2082
Internal Dimensions (WxDxH) mm	1824 X 637 X 1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 + 4 + 4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

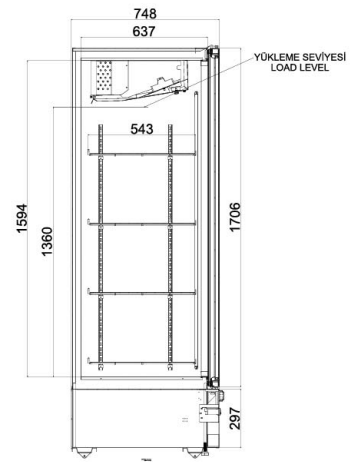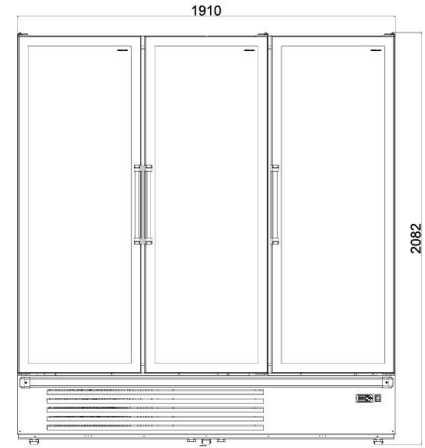

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI M&D 1910 4D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910X748X2082
Internal Dimensions (WxDxH) mm	1824X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

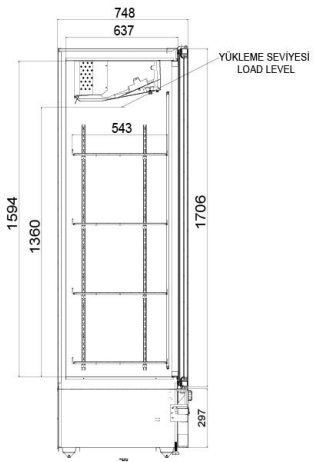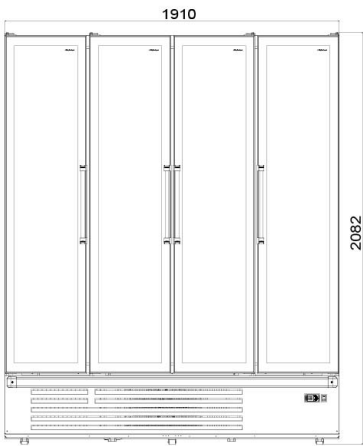

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL




Energy Class and
For More Details

KIWI NT M&D 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666X804X2082
Internal Dimensions (WxDxH) mm	544X637X1594
Temperature Range (°C)	-18°C/-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 51

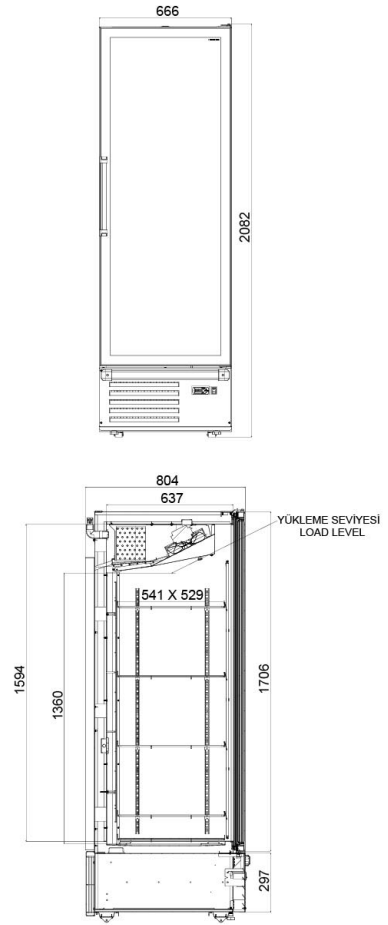

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7043	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI NT M&D 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082 mm
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594 mm
Temperature Range (°C)	-18°C / -23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4+4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 22 / 22 / 26

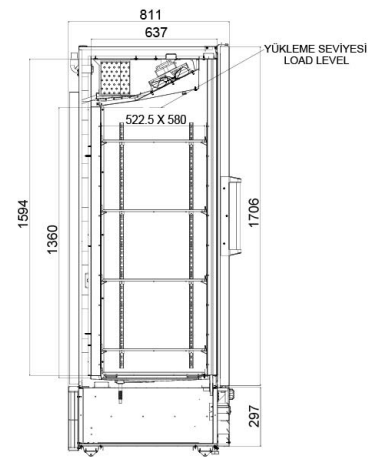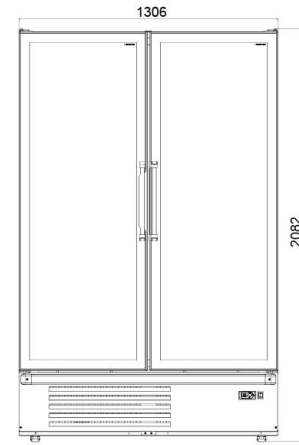

Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
9002	7043	9005	9005	9002
RAL	RAL	RAL	RAL	RAL
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL



Energy Class and
For More Details



AVAILABLE IN
1/2&3 DOOR
VERSION

FRAMELESS DESIGN

LED
LIGHTING

LARGE
INTERNAL
VOLUME

ENERGY
EFFICIENT




KIWI PREMIUM



Series





- ◀ *It provides a quality view with all size handle and special design front grill.*
- ◀ *Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.*
- ◀ *It offers many options that can be turned into a customized product such as chrome-plated handle, led-lighting front grill, door lighting.*
- ◀ *It looks like a single cabinet by positioning side by side.*
- ◀ *It is suitable for various placement combinations with its different sizes for both chiller and freezer versions.*

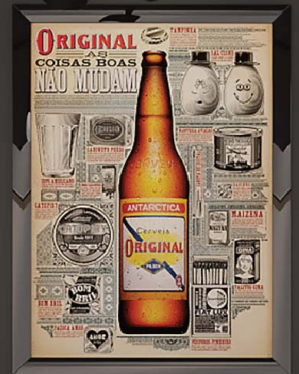



KIWI PREMIUM SERIES

OFFERING THE OPTIONS OF
CUSTOMIZED DESIGN AND
PREMIUM QUALITY

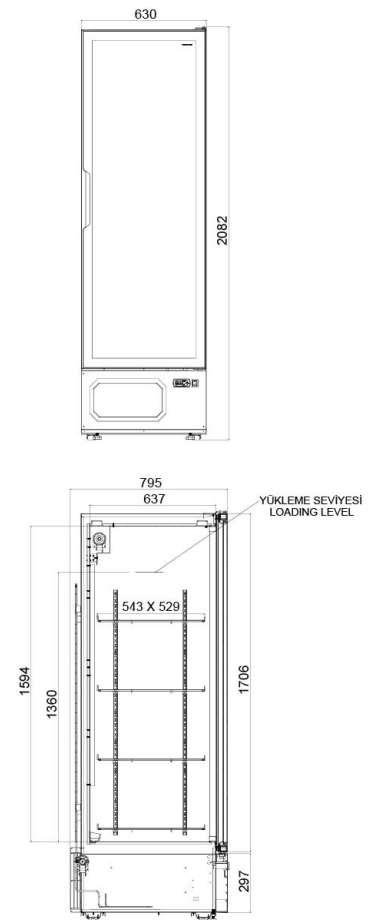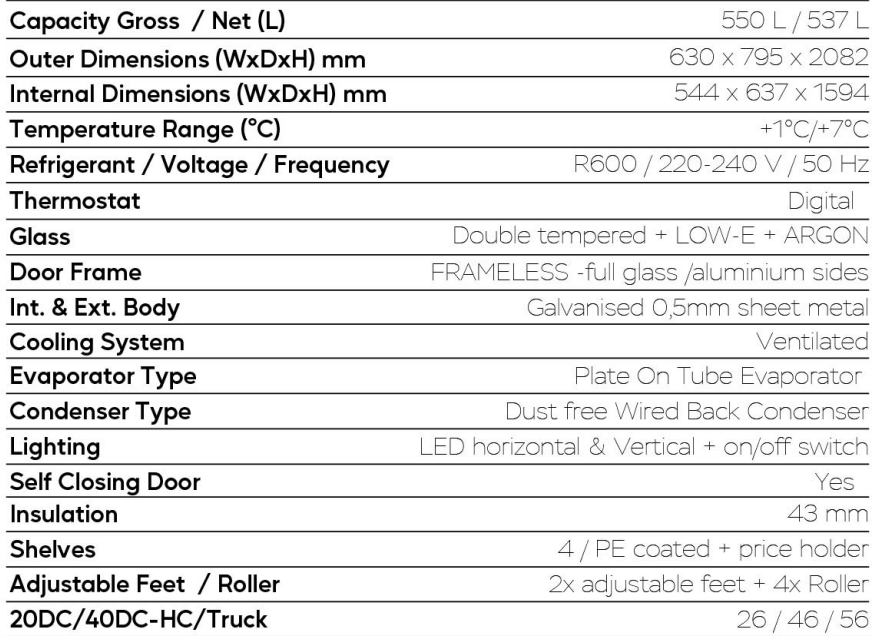


- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

67 | Product Catalogue
2024

KIWI PREMIUM 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805 X 748 X 2082
Internal Dimensions (WxDxH) mm	719 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

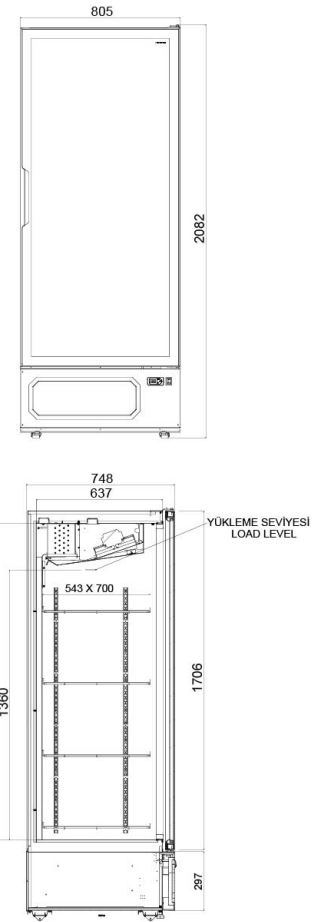

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
9005	RAL 9005	9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI PREMIUM 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270 X 748 X 2082
Internal Dimensions (WxDxH) mm	1184 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

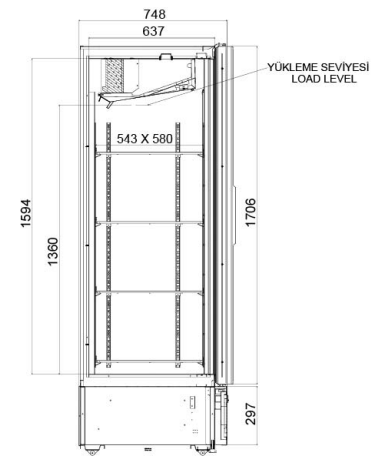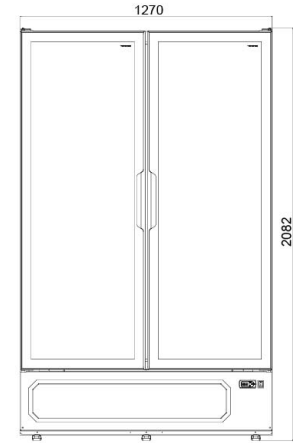

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI PREMIUM 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620 X 748 X 2082
Internal Dimensions (WxDxH) mm	1534 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

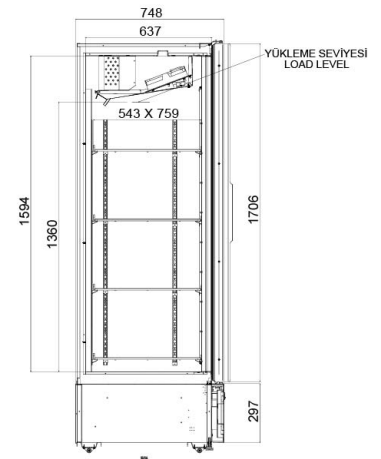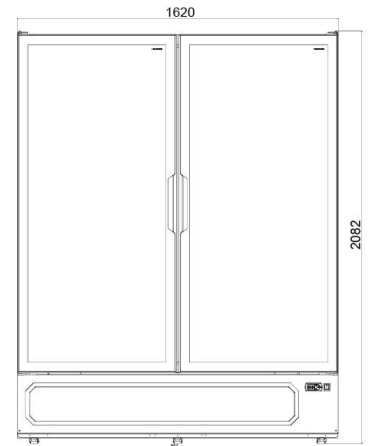

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and
For More Details

KIWI PREMIUM 1620 3D

Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620 X 748 X 2082
Internal Dimensions (WxDxH) mm	1534 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

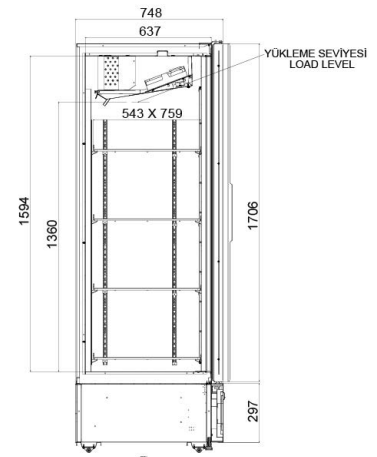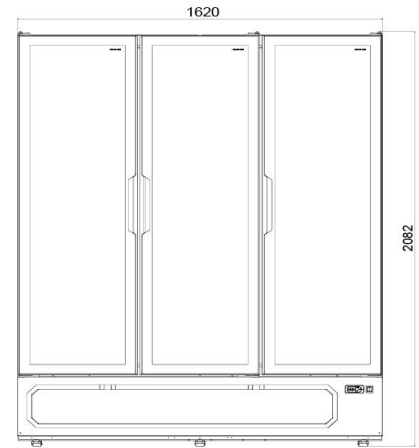

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
9005	9005	9002	7042
RAL	RAL	RAL	RAL
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI PREMIUM 1910 3D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910 x 748 x 2082
Internal Dimensions (WxDxH) mm	1824 x 637 x 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

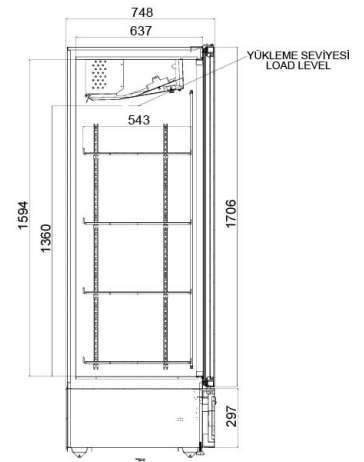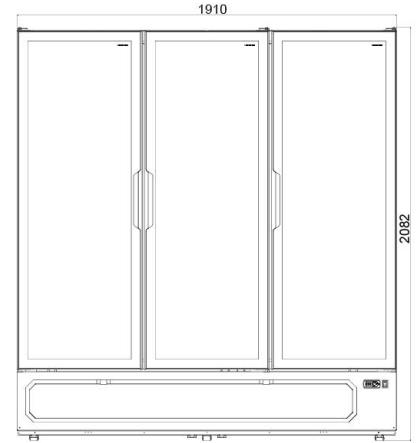

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill


Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and
For More Details

KIWI PREMIUM 1910 4D

Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910 X 748 X 2082
Internal Dimensions (WxDxH) mm	1824 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

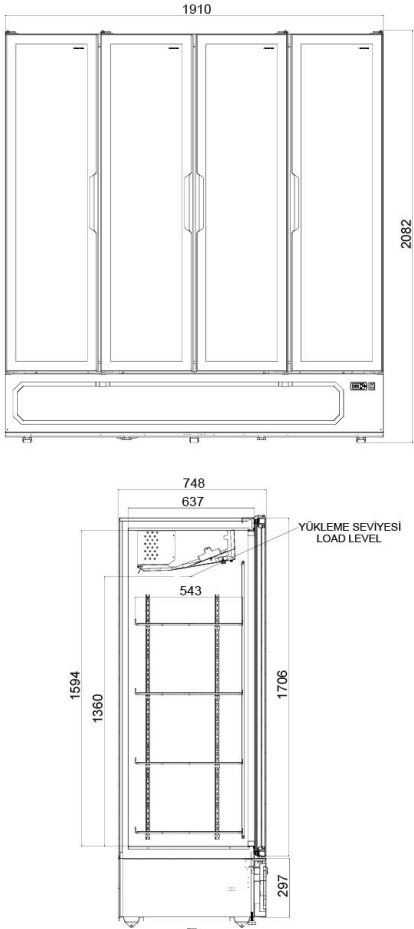

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI NT PREMIUM 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666 x 804 x 2082
Internal Dimensions (WxDxH) mm	544 X 637 X 1594
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type +Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4/ PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 51

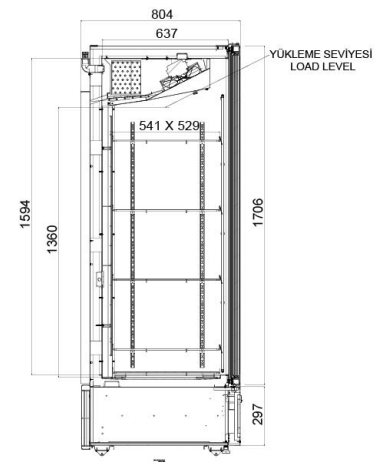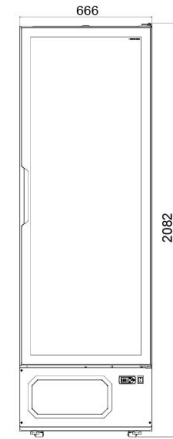

Options

- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and
For More Details

KIWI NT PREMIUM 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 + 4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 22 / 26

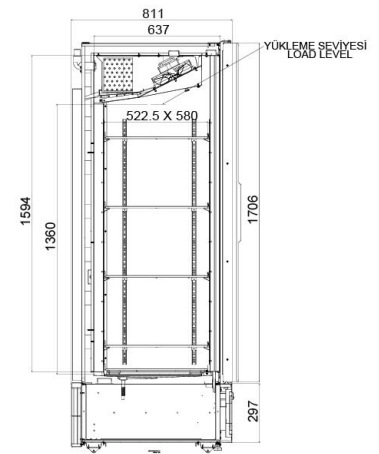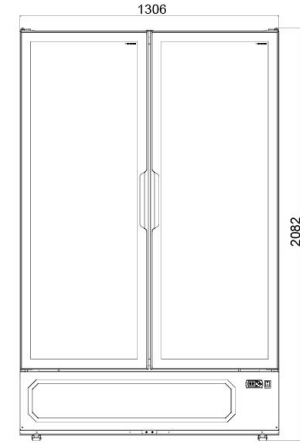

Options


- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and
For More Details

CUSTOM DESIGNS FOR YOU

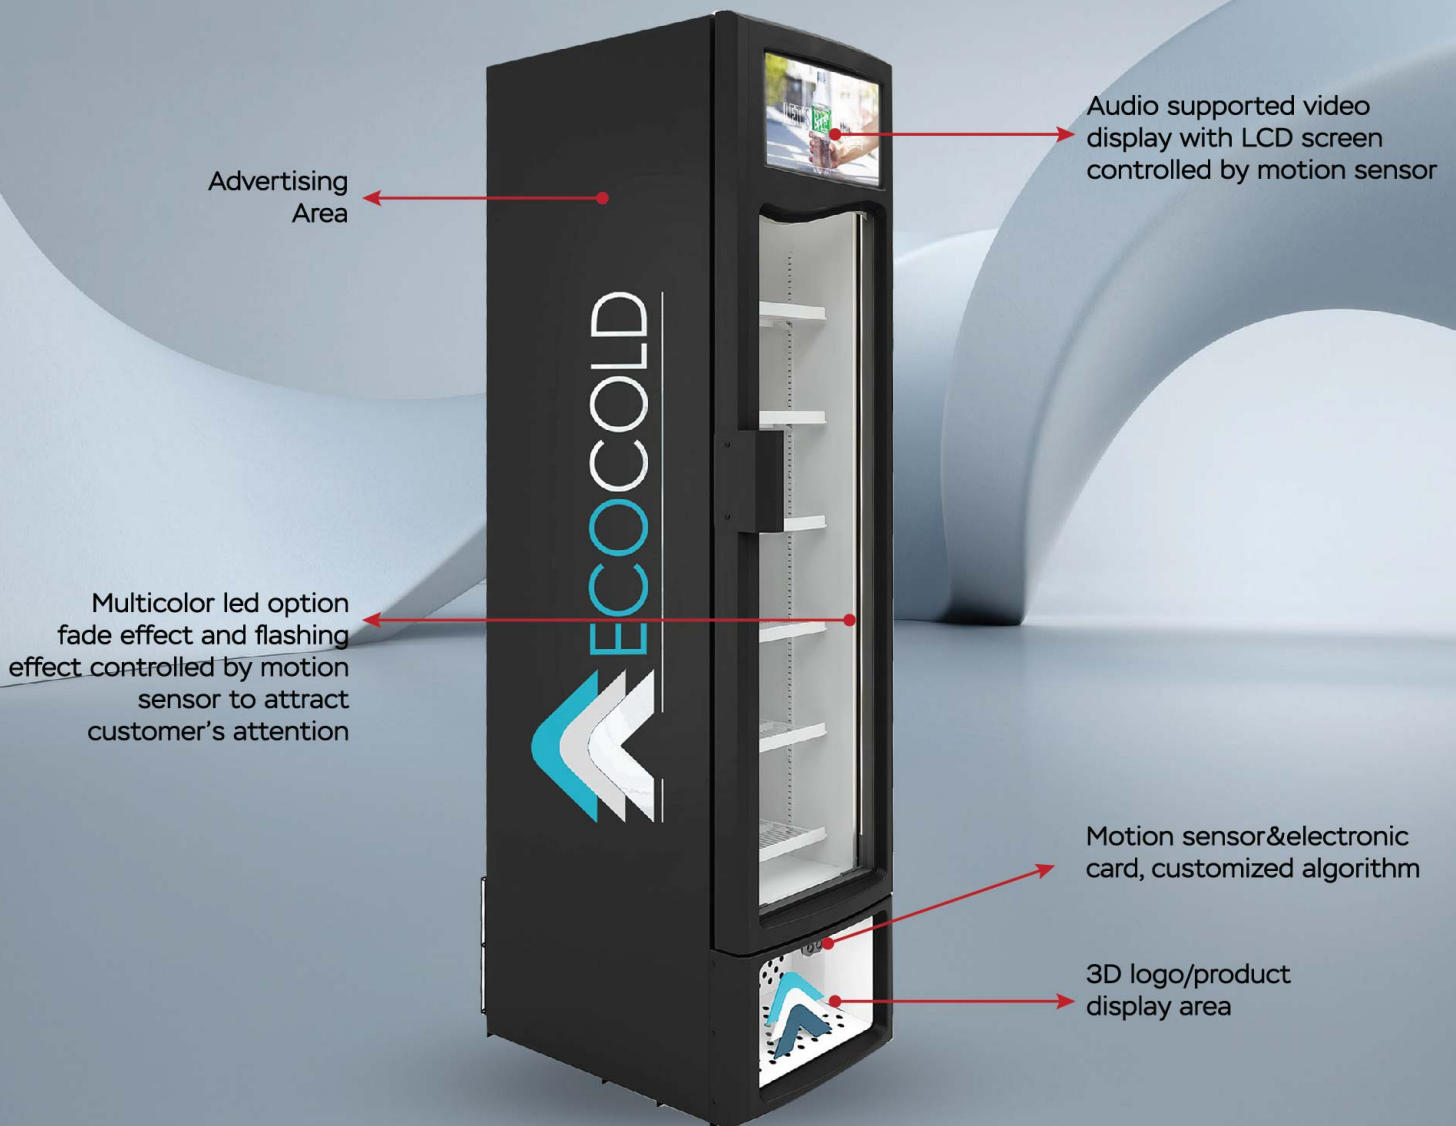

www.ecocold.com.tr

KIWI EDGE



Series



- ◀ *It has a unique design with all appearance of glass.*
- ◀ *The led lighting on the exterior door can be offered in different colours or RGB led red/green/blue can be used.*
- ◀ *Led animation can be integrated thanks to addressable LED and specially developed electronic card.*
- ◀ *Thanks to our special software, it increases the sales of the products by offering different light games by adding a motion sensor according to the customer's location.*
- ◀ *It is suitable for various placement combinations with its different sizes.*




KIWI EDGE SERIES WITH SUSTAINABLE INNOVATION AND UNIQUE DESIGN



KIWI EDGE 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	670 X 835 X 2140
Internal Dimensions (WxDxH) mm	544 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 53

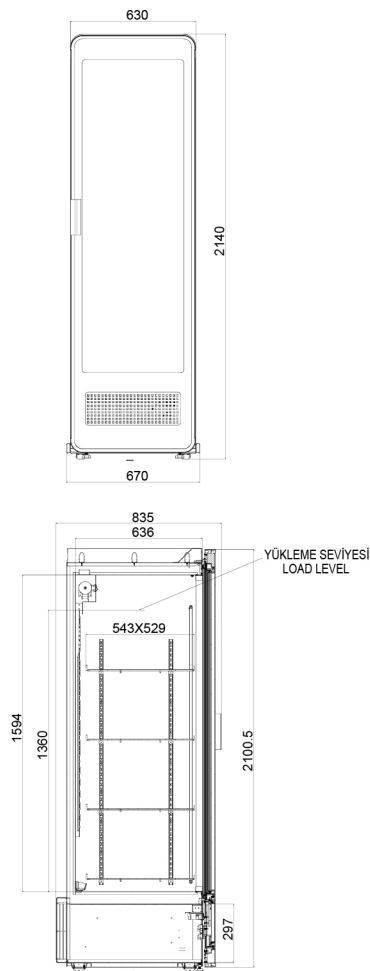

Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
RAL 9005	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL





Energy Class and
For More Details

KIWI EDGE 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1310 X 786 X 2140
Internal Dimensions (WxDxH) mm	1184 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 23 / 25

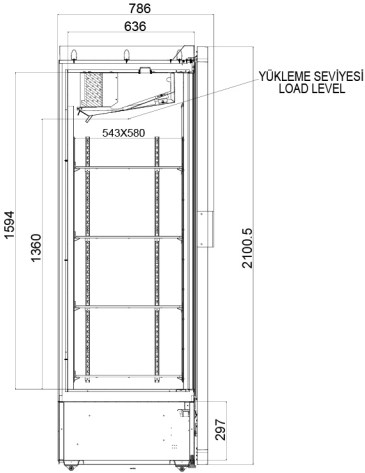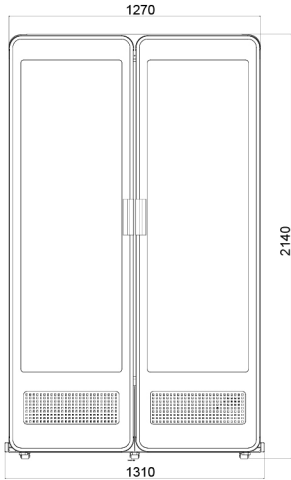

Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
RAL 9005	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL




Energy Class and
For More Details

KIWI EDGE 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1660 X 786 X 2140
Internal Dimensions (WxDxH) mm	1534 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	7 / 14 / 16

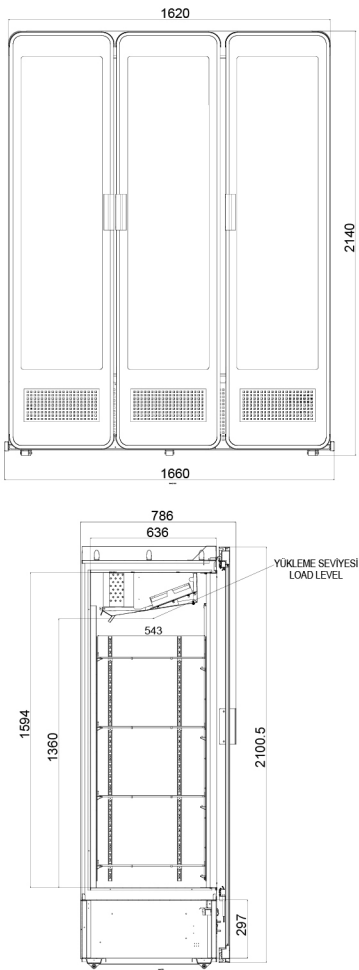

Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
RAL 9005	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL






Energy Class and
For More Details



*THE SERIE THAT ESTABLISHES
INTERACTIVE
CUSTOMER COMMUNICATION
WITH ITS UNIQUE DESIGN*
KIWI EDGE SERIES

OPTIONS

Middle Support Led

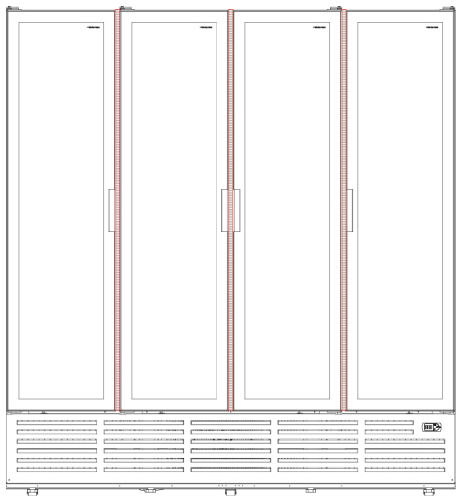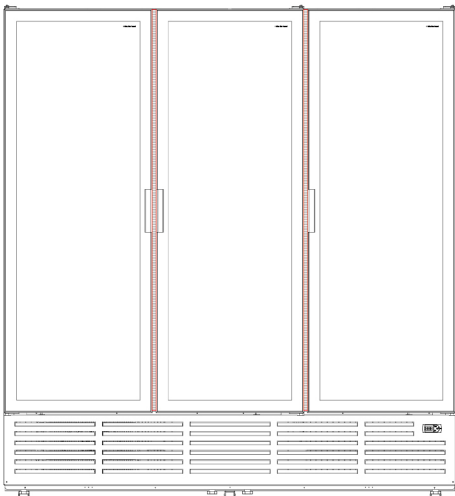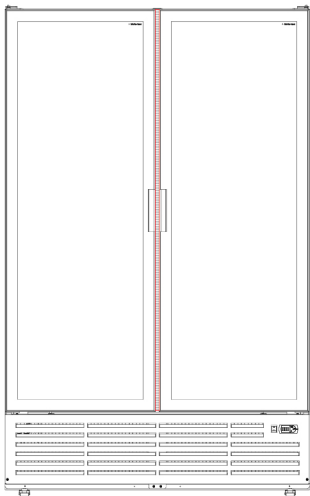

Upper Canopys



OPTIONS

Kiwi Edge RGB Option & Motion Sensor Option



Motion Sensor Option



Buttons for changing door
leds to 7 diffrent colours


Castor Option



Roller




Castors



Lighting from door



Metal Shelves for positive cabinets

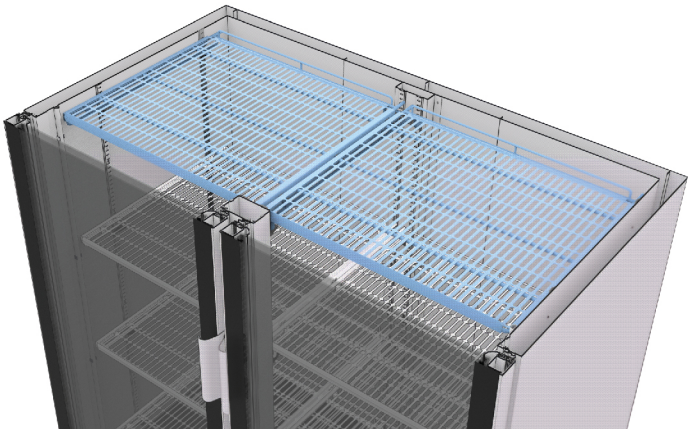

■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	
■	

NOTES:

.....

.....

.....

.....

- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____

NOTES:

.....

.....

.....

.....

- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____

NOTES:

.....

.....

.....

.....

- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____
- ☐ _____

NOTES:

.....

.....

.....

.....

Manisa Address:

Keçiliköy OSB Mah. Ekrem Elginkan Cad.
No:5 Yunusemre / MANİSA

+90 236 213 09 77

info@ecocold.com.tr

@38.6213131 - 27.3291204

 www.ecocold.com.tr



ECOCOLD