



# PRODUCT CATALOGUE

[www.ecocold.com.tr](http://www.ecocold.com.tr)

# Corporate Values



Low CO2 emission  
Ecological Product  
Sustainability



Innovative Solutions  
Digitalisation  
Connectivity



Customer Satisfaction  
Customer-Oriented Quality  
Customer Value Offer



High Quality  
Highly Productivity  
Highly Flexibility

## History

- 2003** ● ND Group was founded.
- 2012** ● Ecocold was founded.
- 2015** ● A factory in Izmir was jointly established with the Italian Mondial Group.
- 2016** ● Mondial Turkey Facility was taken over and manufacturing moved to Manisa.
- 2017** ● ND Group invested in all shares of the Ecocold factory.
- 2018** ● New factory investment of Ecocold.
- 2019** ● New logistics center of Ecocold was activated.



Ecocold, the foundation of which was laid in 2012 as the Turkish operation of the Italian Mondial Framec Group, carried out its manufacture to Manisa in 2016. It was fully incorporated into the ND group of companies which is domestic capital. Ecocold has attained a place in the commercial refrigerator market as a result of the combination of Italian design/technology and the experience of the ND Group and has prioritized the quality criteria and is aware that its products are a marketing instrument and the importance of visuality. Ecocold manufactures in accordance with European norms in the commercial refrigeration sector and has international valid quality management system certifications. Ecocold products not only make all the difference in the presenting of your products with the visual quality, but also provide an advantage of high efficiency and low energy consumption. Ecocold exports horizontal type frozen storage cabinets or vertical type display coolers to more than 40 countries; this is why, as a solution partner, we stand out from rival companies by adding value to our customers in both the retail and FMCG sectors. Our goal is to provide our customers with excellent quality, stylish, efficient, economical and eco-friendly products.

*Ecocold, a fresh future for you...*

🍏 APPLE



*Series*



- ◀ *It maximizes heat transfer with D Form aluminium pipe winding.*
- ◀ *It provides excellent insulation with 71mm high-intensity polyurethane.*
- ◀ *It does not require maintenance thanks to dust-proof condenser.*
- ◀ *With its aluminium frame and electrostatic powder-painted and galvanized-coated inner and outer body, it is long-lasting.*
- ◀ *Apple Series provides minimum energy consumption with its negative (static), positive (dynamic) or dual regime options and large volume.*
- ◀ *Apple is suitable for installation types as single-block and square-type.*
- ◀ *It allows you to organize different layouts in the Market.*



ed Food

Cereals

Cereals

Cereals

A man in a light pink shirt and blue jeans is pushing a shopping cart filled with groceries, including bread, vegetables, and a carton of milk. He is walking through a well-lit grocery store aisle.

A large white chest freezer with a glass top is filled with various frozen food items. The freezer has a control panel on the left side and a handle on the right side.





ENERGY SAVER,  
EASY TO INSTALL,  
**RELIABLE** ISLAND  
FREEZER SERIES  
**APPLE**

# APPLE 188



Capacity Gross / Net (L)	870 L / 643 L / PT: 608 L
Outer Dimensions (WxDxH) mm	1881*932*900 mm
Internal Dimensions (WxDxH) mm	1730*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

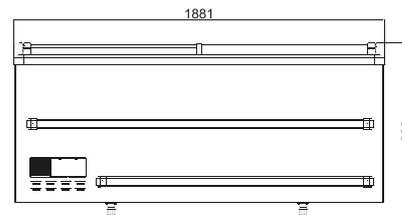

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	RAL 9002	RAL 9005	RAL 7043





Energy Class and For More Details

# APPLE 212



Capacity Gross / Net (L)	1005 L / 745 L / PT: 710 L
Outer Dimensions (WxDxH) mm	2126*932*900 mm
Internal Dimensions (WxDxH) mm	1976*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

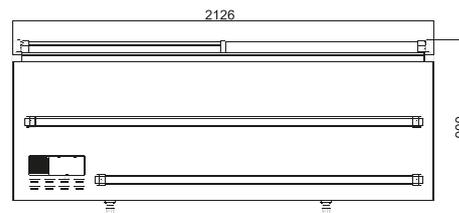

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	RAL	OPTIONAL	OPTIONAL
9002	9002	9005	7043





Energy Class and  
For More Details

# APPLE 250



Capacity Gross / Net (L)	1216 L / 905 L / PT: 870 L
Outer Dimensions (WxDxH) mm	2510*932*900 mm
Internal Dimensions (WxDxH) mm	2360*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 22 / 30

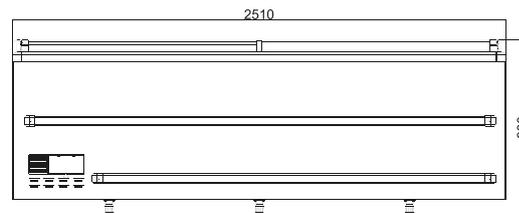

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD	OPTIONAL	OPTIONAL
	RAL 9002	RAL 9005	RAL 7043





Energy Class and For More Details

# APPLE HEAD (200)



Capacity Gross / Net (L)	865 L / 620 L / PT: 585 L
Outer Dimensions (WxDxH) mm	2010*932*900 mm
Internal Dimensions (WxDxH) mm	1860*780*677 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

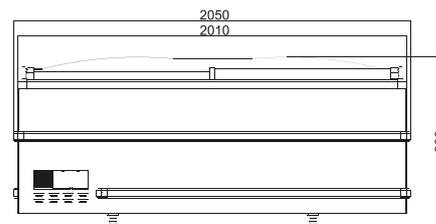

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	9002	9005	7043
RAL	RAL	RAL	RAL




Energy Class and  
For More Details

# APPLE FG 188



Capacity Gross / Net (L)	870 L / 470 L / PT: 435 L
Outer Dimensions (WxDxH) mm	1881*932*900 mm
Internal Dimensions (WxDxH) mm	1730*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39



## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL	RAL	RAL	RAL





Energy Class and For More Details

# APPLE FG 212



Capacity Gross / Net (L)	1005 L / 560 L / PT: 525 L
Outer Dimensions (WxDxH) mm	2126*932*900 mm
Internal Dimensions (WxDxH) mm	1976*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

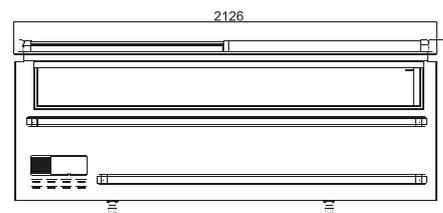

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body RAL 9002	Outer Body RAL 9002	Outer Body RAL 9005	Outer Body RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and  
For More Details

# APPLE FG 250



Capacity Gross / Net (L)	1216L / 670 L PT: 635 L
Outer Dimensions (WxDxH) mm	2510*932*900 mm
Internal Dimensions (WxDxH) mm	2360*780*730 mm
Temperature Range (°C)	NT: -18°C/-23°C ; PT: -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas Resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 22 / 30

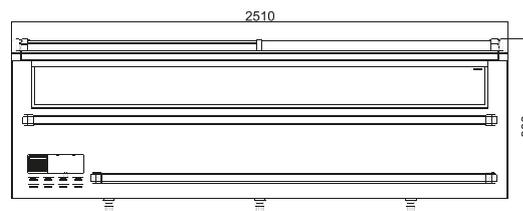

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and  
For More Details

# APPLE FG HEAD (200)



Capacity Gross / Net (L)	865 L / 511 L / PT: 476 L
Outer Dimensions (WxDxH) mm	2010*932*900 mm
Internal Dimensions (WxDxH) mm	1860*780*677 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al Frame & Hot Gas resistance
Int. & Ext Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Manual Defrost PT: Ventilated
Condenser	Dust Free / Maintenance free
Lighting	LED + on/off switch
Insulation	71 mm
Adjustable Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 35 / 39

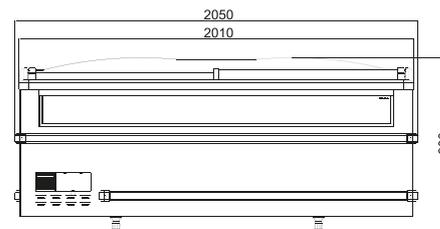

## Options

- Second line bumpers
- Price label
- Grid separators
- Grid baskets
- Castor
- Island middle sheet price holder
- Dual mode

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	9002	9005	7043
RAL	RAL	RAL	RAL



Energy Class and  
For More Details

# ORANGE



*Series*



- ◀ *It offers minimum consumption with an inverter compressor option.*
- ◀ *No-Frost cabinet with hot gas automatic defrost system.*
- ◀ *It provides maximum efficiency by performing the defrosting process with hot gas in the system.*
- ◀ *Available in negative and dual mode regimes.*
- ◀ *It provides the opportunity to create different layouts with single-block and island-type options.*

# Frozen Food

Food







oods

**ORANGE SERIES** COMBINING  
INNOVATIVE DESIGN AND  
ENVIRONMENTALLY FRIENDLY  
NO-FROST TECHNOLOGY

# ORANGE 188



Capacity Gross / Net (L)	980 L / 756 L / PT: 721 L
Outer Dimensions (WxDxH) mm	1881*932*950 mm
Internal Dimensions (WxDxH) mm	1730*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

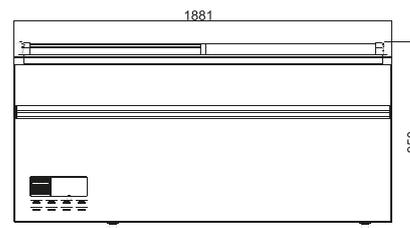

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castor ( 4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL	RAL	RAL	RAL





Energy Class and For More Details

# ORANGE 212



Capacity Gross / Net (L)	1123 L / 870 L / PT: 835 L
Outer Dimensions (WxDxH) mm	2126*932*950 mm
Internal Dimensions (WxDxH) mm	1976*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

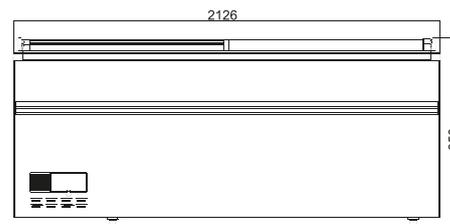

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castor ( 4 Pcs)
- Island middle sheet price holder

Inner Body RAL 9002 STANDARD	Outer Body RAL 9002 STANDARD	Outer Body RAL 9005 OPTIONAL	Outer Body RAL 7043 OPTIONAL
---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------




Energy Class and  
For More Details

# ORANGE 250



Capacity Gross / Net (L)	1351 L / 1058 L PT: 1023 L
Outer Dimensions (WxDxH) mm	2510*932*950 mm
Internal Dimensions (WxDxH) mm	2360*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 16 / 20



## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 6 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# ORANGE HEAD



Capacity Gross / Net (L)	980 L / 740 L PT:705 L
Outer Dimensions (WxDxH) mm	2010*932*950 mm
Internal Dimensions (WxDxH) mm	1860*780*762 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

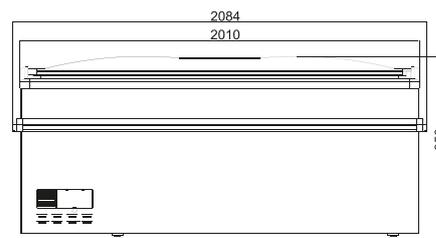

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# ORANGE FG 188



Capacity Gross / Net (L)	986 L / 633 L PT:598 L
Outer Dimensions (WxDxH) mm	1881*932*950 mm
Internal Dimensions (WxDxH) mm	1730*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free / Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

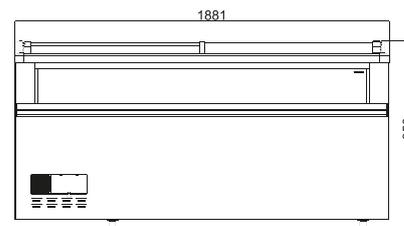

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	RAL 9002	RAL 9005	RAL 7043




Energy Class and  
For More Details

# ORANGE FG 212



Capacity Gross / Net (L)	1130 L / 730 L PT:695 L
Outer Dimensions (WxDxH) mm	2126*932*950 mm
Internal Dimensions (WxDxH) mm	1976*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

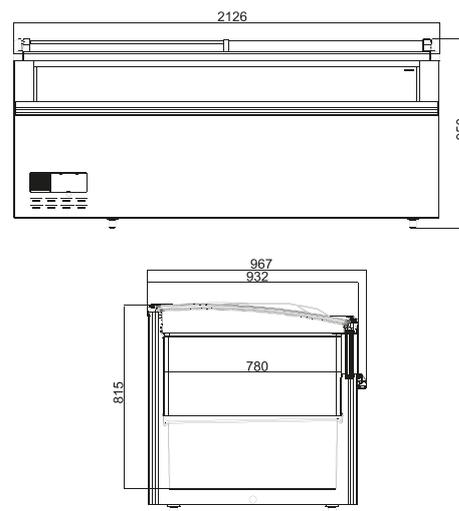

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	RAL	OPTIONAL	OPTIONAL
9002	9002	9005	7043





Energy Class and  
For More Details

# ORANGE FG 250



Capacity Gross / Net (L)	1360 L / 891 L PT: 856 L
Outer Dimensions (WxDxH) mm	2510*932*950 mm
Internal Dimensions (WxDxH) mm	2360*780*815 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AlFrame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	6 pcs
20DC/40DC/40HC/Truck	8 / 16 / 16 / 20

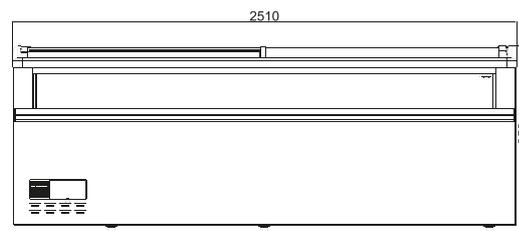

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 6 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	9002	9005	7043
RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# ORANGE FG HEAD



Capacity Gross / Net (L)	983 L / 685 L / PT: 650 L
Outer Dimensions (WxDxH) mm	2010*932*950 mm
Internal Dimensions (WxDxH) mm	1860*780*762 mm
Temperature Range (°C)	NT -18°C/-23°C ; PT -1°C/+5°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&Hot Gas resistance
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	D shape al. Tube + al. tape
Cooling System	NT: Static - Auto Defrost PT: Ventilated
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	LED + on/off switch
Insulation	71 mm
Fixed Leg	4 pcs
20DC/40DC/40HC/Truck	12 / 24 / 24 / 26

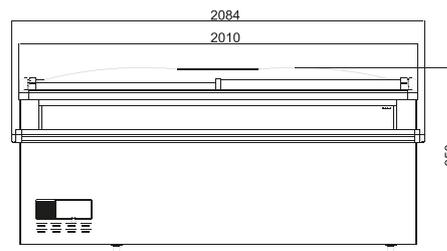

## Options

- Variable speed compressor
- Second line bumpers
- Price Label
- Grid separators (Set)
- Grid Baskets
- Branding / Sticker
- Castors ( 4 Pcs)
- Island middle sheet price holder

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL




Energy Class and  
For More Details

# OPTIONS

## Price Label



## Kickplate

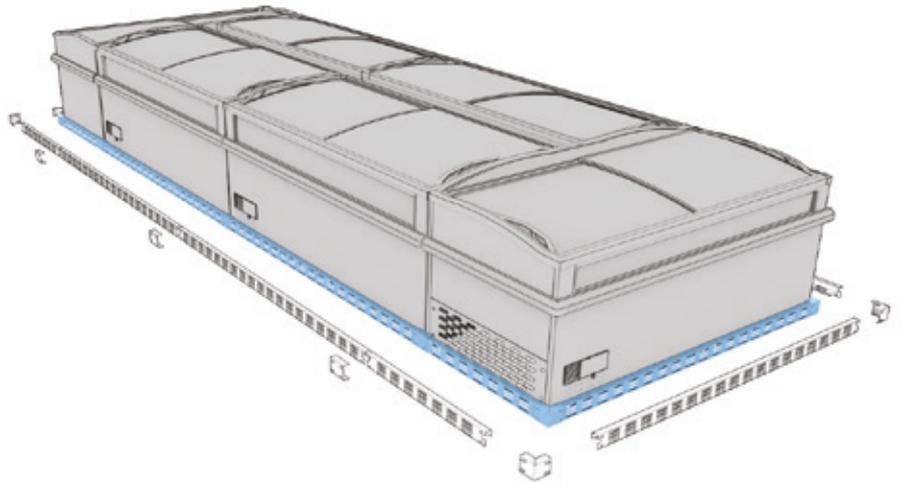

## Standard Shelf System



## Standard Shelf System with separator




## Basket System




MODULE	BASKET QTY
188 / 188 FG	6 PCS
212 / 212 FG	6 PCS
250 / 250 FG	8 PCS
APPLE HEAD	7 PCS
ORANGE HEAD	6 PCS

# OPTIONS

## Island Middle Shelf

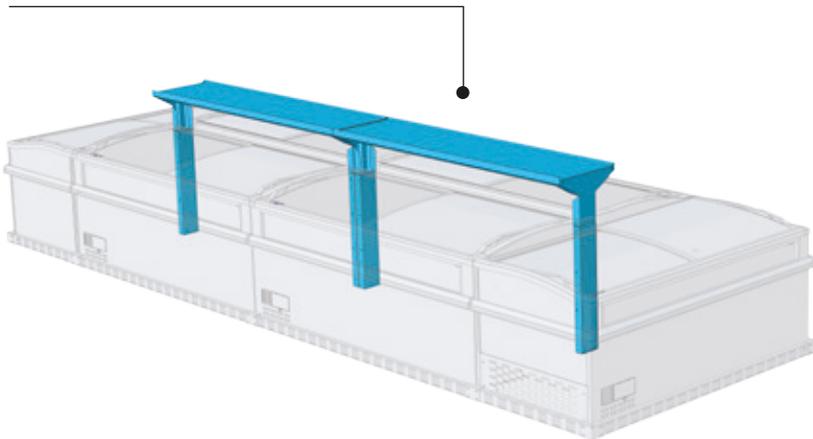


## Island Middle Price Holder

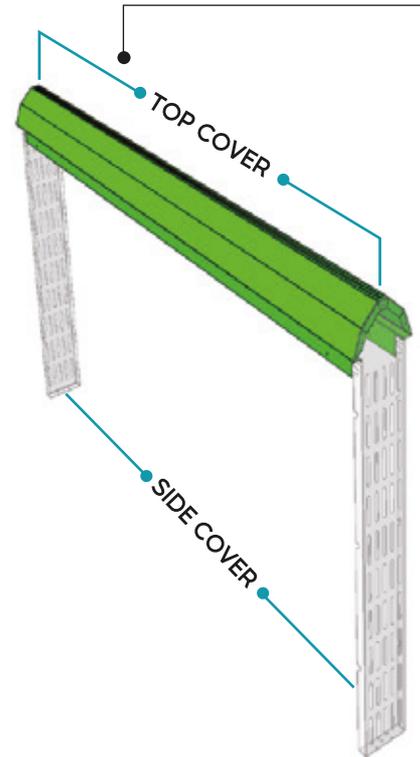

## Castor Options



LEGS

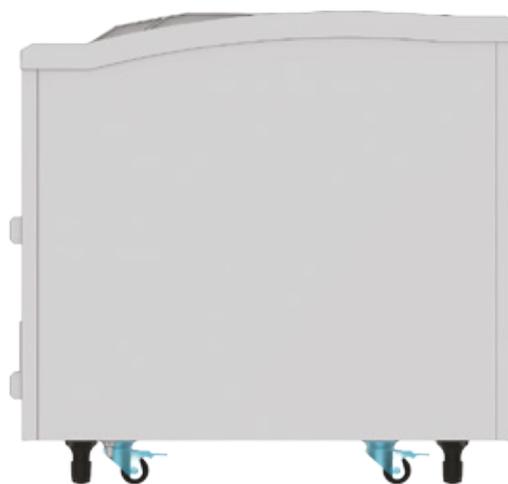

LEGS + CASTOR

MODULE	CASTOR & LEGS
188 / 188 FG	4 PCS / 4 PCS
212 / 212 FG	4 PCS / 4 PCS
250 / 250 FG	6 PCS / 6 PCS
APPLE HEAD	4 PCS / 4 PCS
ORANGE HEAD	4 PCS / 4 PCS



# CITRUS



*Citrus*





- ◀ *Perfect solution for top-freezer saves from your space & energy and also citrus is adaptable to all kind of chest freezers in your stores.*
- ◀ *It provides you a low energy consumption thanks to its automatic defrost.*
- ◀ *Citrus enables you to display your product as a stand-alone or an island.*

# CITRUS HEAD



Capacity Gross / Net (L)	505 L / 410 L
Outer Dimensions (WxDxH) mm	1290 X 950 X 2470
Internal Dimensions (WxDxH) mm	1168 X 458 X 974
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al Frame & FRAMELESS
Int. & Ext Body	Galvanised 0,5 mmsheet metal
Glass	Triple Tempered
Thermostat	Digital
Evaporator Type	Fin Type + Hot Gas Defrost
Cooling System	Dynamic
Condenser	Dust Free + Maintenance Free
Lightening	Vertical + Horizontal
Insulation	61 mm
20DC/40DC/40HC/Truck	12 / 25 / 28
Shelves	Base+3 / PE coated + price label tag

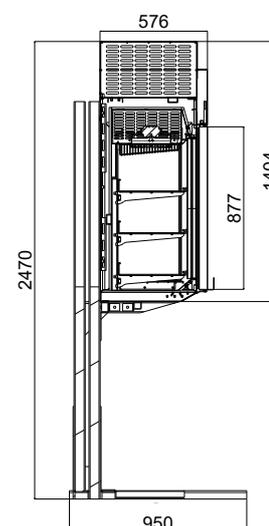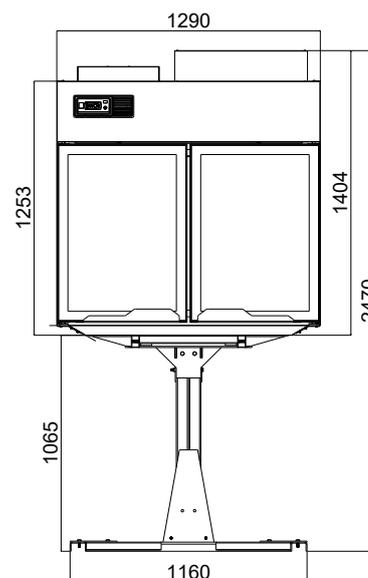

## Options

- Door lock
- Lighting from door
- Variable speed compressor

STANDARD	OPTIONAL	OPTIONAL
RAL 9002	RAL 9005	RAL 7043





Energy Class and For More Details

# CITRUS 212



Capacity Gross / Net (L)	865 L / 825 L
Outer Dimensions (WxDxH) mm	2121 X 950 X 2476 mm
Internal Dimensions (WxDxH) mm	2000 x 458 x 974 mm
Temperature Range (°C)	NT: -18 / -23 ; PT: -1 / +5
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame & FRAMELESS
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Triple Tempered
Evaporator Type	Fin Type +Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	Horizontal led + on/off button
Insulation	61 mm
Adjustable Leg	-
20DC/40DC/40HC/Truck	5 / 12 / 12 / 13

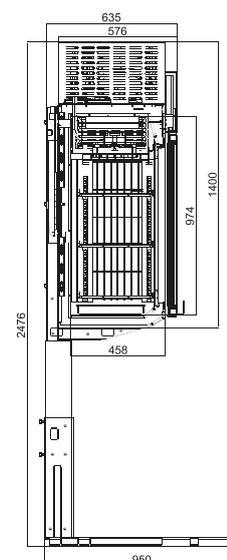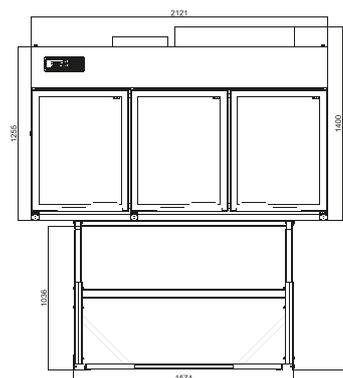

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
PAL	PAL
9002	9005
STANDARD	OPTIONAL





Energy Class and  
For More Details

# CITRUS 250



Capacity Gross / Net (L)	1030 L / 990 L
Outer Dimensions (WxDxH) mm	2506 x 950 x 2476 mm
Internal Dimensions (WxDxH) mm	2384 x 458 x 974 mm
Temperature Range (°C)	NT: -18 / -23 ; PT: -1 / +5
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al.Frame&FRAMELESS
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Glass	Curved-tempered- Low-E
Thermostat	Digital
Evaporator Type	Fin Type +Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free /Maintenance free
Lighting type & on/off switch	Horizonatal led + on/off button
Insulation	61 mm
Adjustable Leg	-
20DC/40DC/40HC/Truck	4 / 8 / 8 / 10

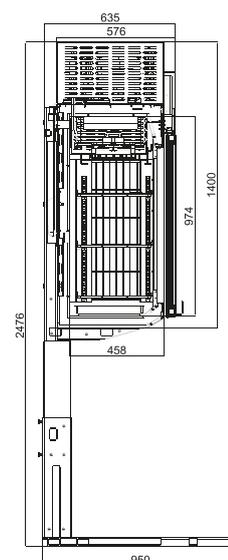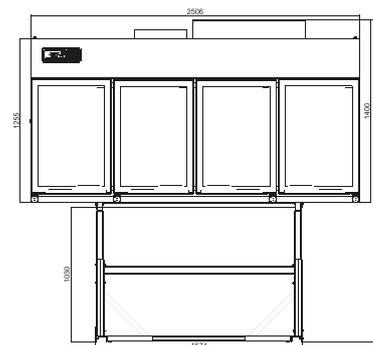

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
STANDARD	OPTIONAL
9002	9005
PAL	PAL



Energy Class and  
For More Details

❄️ CPI



*Series*



◀ ***Frameless & full door smart design which provides high visibility.***

◀ ***Compact Plug-in Multideck series with low base.***

◀ ***For beverages, meat and dairy product, working on 3M0 conditions and for frozen food working on 3L1 condition.***

◀ ***Energy saving by hot gas defrost system***

# FROZEN FOODS

MEAT



# DAIRY



CHICKEN



# CPI 1290 PT



Capacity Gross / Net (L)	1195 L / 765 L
Outer Dimensions (WxDxH) mm	1295 X 834 X 2043
Internal Dimensions (WxDxH) mm	1173 X 637 X 1594
Temperature Range (°C)	-1°C/+4°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	AI Frame & FRAMELESS
Int. & Ext Body	Galvanised 0,5 mm Sheet Metal
Glass	Double Tempered
Thermostat	Digital
Evaporator Type	Fin Type
Cooling System	Dynamic
Condenser	Dust Free + Maintenance Free
Lightening	Vertical + Horizontal
Insulation	61 mm
Adjustable Leg	8x adjustable leg + 6x rollers
20DC/40DC/40HC/Truck	8 / 16 / 20
Shelves	Base + 4, Metal Shelves

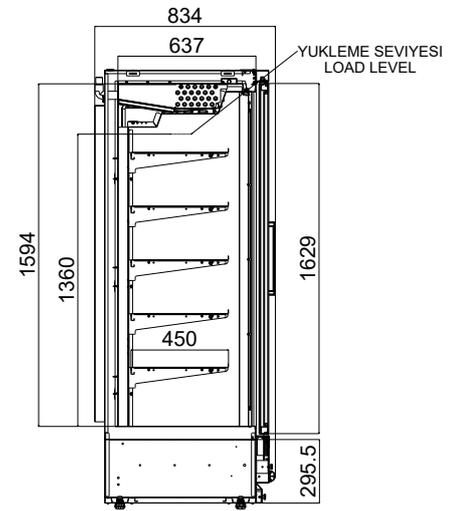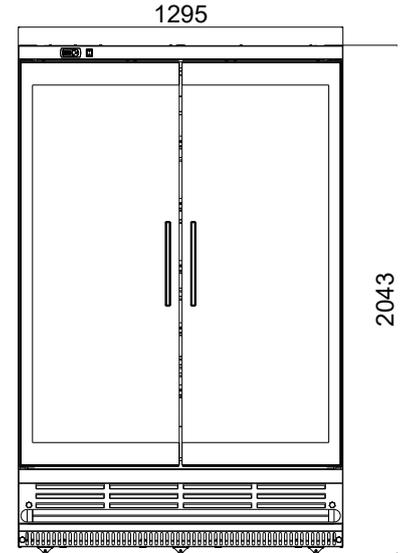

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
RAL 7022	RAL 7022
STANDARD	STANDARD





Energy Class and  
For More Details

# CPI 2500 PT



Capacity Gross / Net (L)	2400 L / 1545 L
Outer Dimensions (WxDxH) mm	2488 X 834 X 2043
Internal Dimensions (WxDxH) mm	2366 X 637 X 1594
Temperature Range (°C)	-1°C/+4°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al Frame & FRAMELESS
Int. & Ext Body	Galvanised 0,5 mm Sheet Metal
Glass	Double Tempered
Thermostat	Digital
Evaporator Type	Fin Type
Cooling System	Dynamic
Condenser	Dust Free + Maintenance Free
Lightening	Vertical + Horizontal
Insulation	61 mm
Adjustable Leg	8x adjustable leg + 8x rollers
20DC/40DC/40HC/Truck	4 / 8 / 10
Shelves	Base + 4 , Metal Shelves

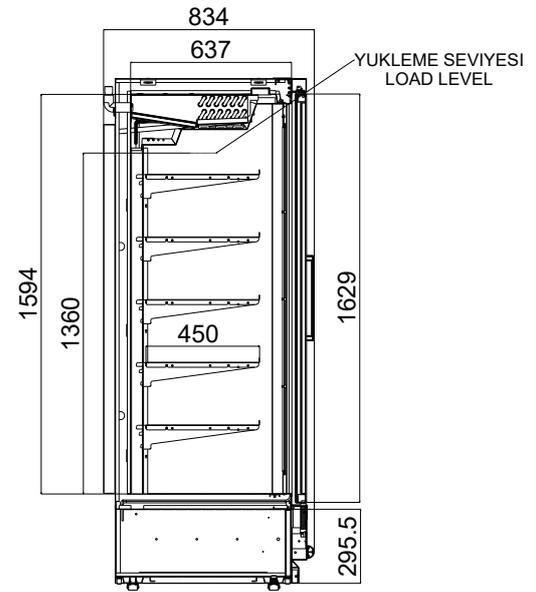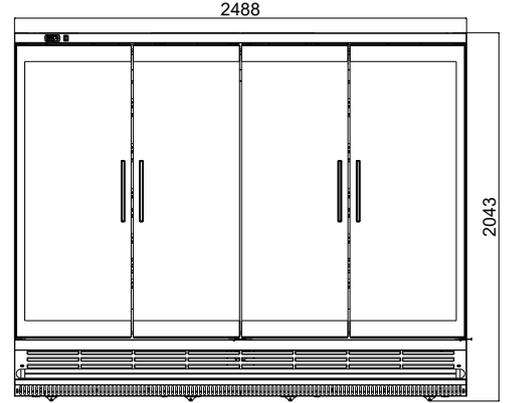

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
RAL 7022	RAL 7022
STANDARD	STANDARD





Energy Class and  
For More Details

# CPI 1650 NT



Capacity Gross / Net (L)	1557 L / 1103 L
Outer Dimensions (WxDxH) mm	1656 X 834 X 2043
Internal Dimensions (WxDxH) mm	1534 X 637 X 1594
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al Frame & FRAMELESS
Int. & Ext Body	Galvanised 0,5 mm Sheet Metal
Glass	Triple Tempered
Thermostat	Digital
Evaporator Type	Fin Type + Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free + Maintenance Free
Lightening	Vertical + Horizontal
Insulation	61 mm
Adjustable Leg	8x adjustable leg + 6x rollers
20DC/40DC/40HC/Truck	6 / 14 / 16
Shelves	Base + 4 , Metal Shelves

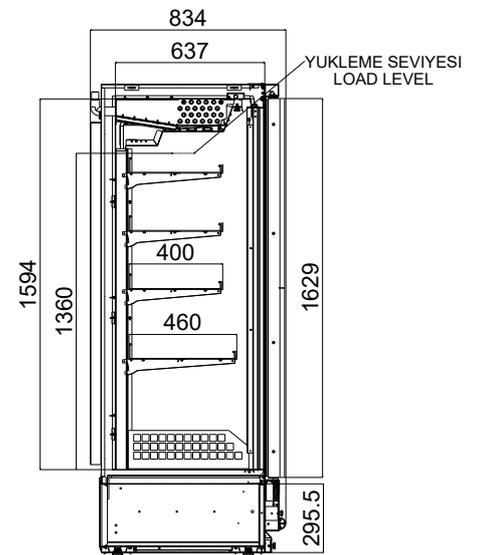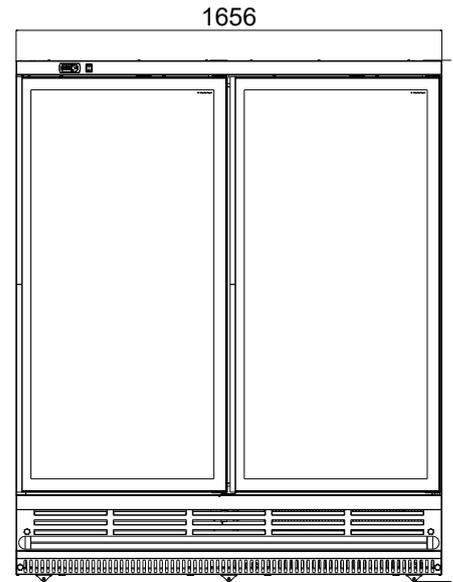

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
RAL 7022 STANDARD	RAL 7022 STANDARD





Energy Class and  
For More Details

# CPI 2500 NT



Capacity Gross / Net (L)	2400 L / 1700 L
Outer Dimensions (WxDxH) mm	2488 X 834 X 2043
Internal Dimensions (WxDxH) mm	2366 X 637 X 1594
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Frame	Al Frame & FRAMELESS
Int. & Ext Body	Galvanised 0,5 mm Sheet Metal
Glass	Triple Tempered
Thermostat	Digital
Evaporator Type	Fin Type + Auto Defrost
Cooling System	Dynamic
Condenser	Dust Free + Maintenance Free
Lightening	Vertical + Horizontal
Insulation	61 mm
Adjustable Leg	8x adjustable leg + 8x rollers
20DC/40DC/40HC/Truck	6 / 14 / 16
Shelves	Base + 4 , Metal Shelves

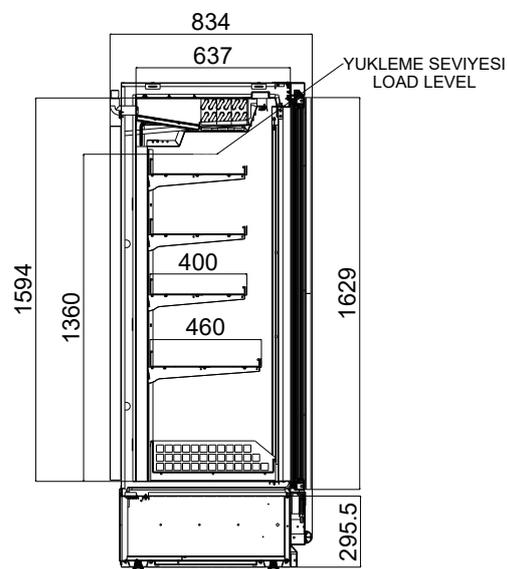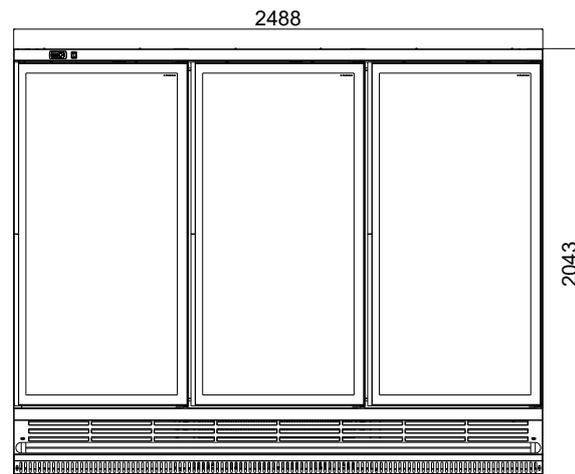

## Options

- Door lock
- Lighting from door
- Variable speed compressor

Inner Body	Outer Body
RAL 7022	RAL 7022
STANDARD	STANDARD



Energy Class and  
For More Details



KIWI



*Series*

The logo for ECOCOLD features a stylized mountain range icon on the left, composed of three overlapping, upward-pointing chevron shapes in white, light gray, and dark gray. To the right of the icon, the word "ECOCOLD" is written in a clean, white, sans-serif font. A thin white horizontal line is positioned directly beneath the text.

# ECOCOLD

- ◀ ***Frameless & full door smart design which provides large volume and very low energy consumption. Kiwi series is a game changer which offers high flexibility and huge savings.***
- ◀ ***It provides a large internal volume with a depth of 74 cm.***
- ◀ ***Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.***
- ◀ ***It is a remarkable and stylish product with frameless glass, LED illumination and different color options.***
- ◀ ***It looks like a single cabinet by positioning side by side.***
- ◀ ***It provides maximum performance & minimum energy consumption with high insulation, Low E coated and argon gas-filled glass.***
- ◀ ***It provides a number of placement opportunities with various size options of doors for both chiller and freezer versions.***





UNIQUE ENGINEERING  
DEVELOPING ITSELF  
CONTINUOUSLY  
**KIWI**



# KIWI 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	630x795x2082
Internal Dimensions (WxDxH) mm	544x637x1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	26 / 46 / 56

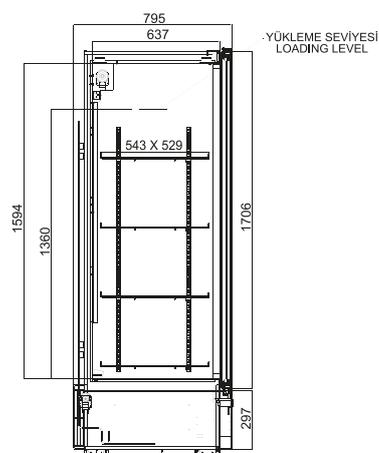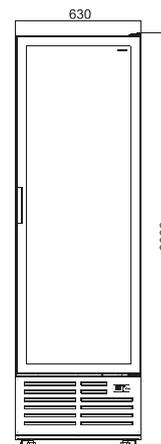

## Options

- Door lock
- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD RAL 9002	OPTIONAL RAL 9005	OPTIONAL RAL 7043





Energy Class and For More Details

# KIWI 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805X748X2082
Internal Dimensions (WxDxH) mm	719X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Var
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

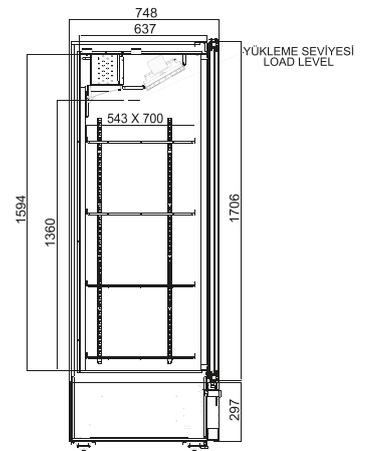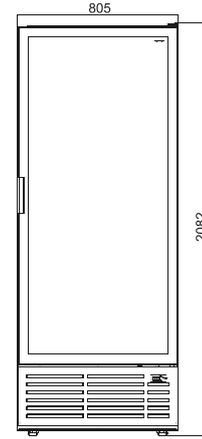

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL	RAL	RAL	RAL
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and  
For More Details

# KIWI 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270X748X2082
Internal Dimensions (WxDxH) mm	1184X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

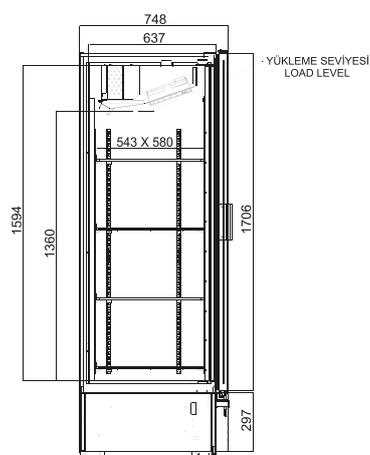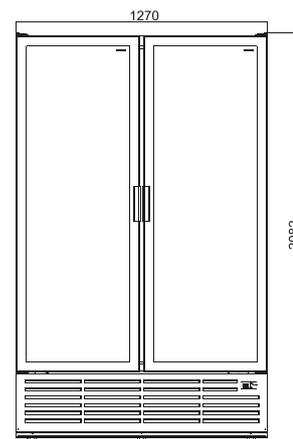

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD RAL 9002	OPTIONAL RAL 9005	OPTIONAL RAL 7043





Energy Class and For More Details

# KIWI 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

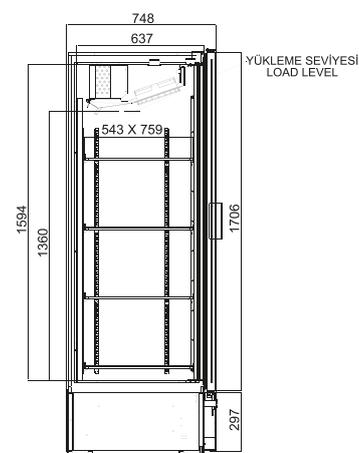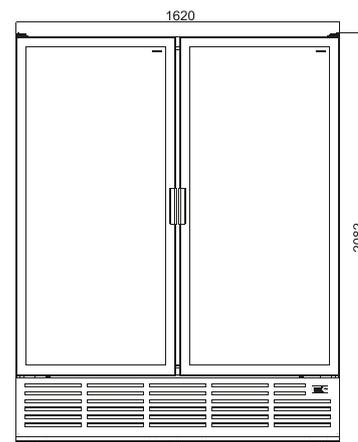

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL





Energy Class and  
For More Details

# KIWI 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

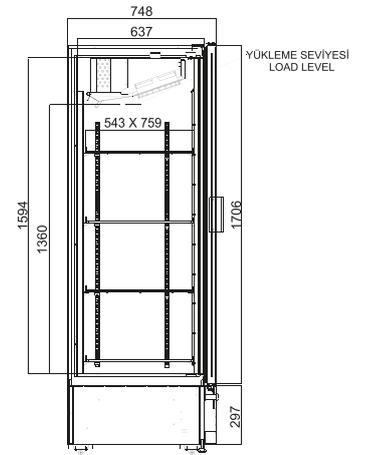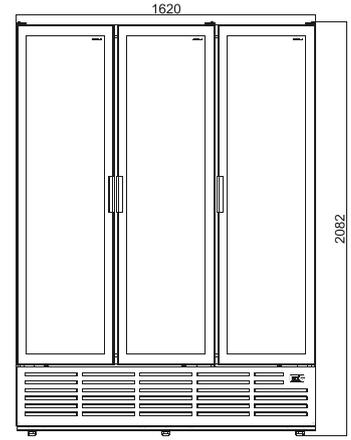

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	9002	9005	7043
PAL	PAL	PAL	PAL





Energy Class and  
For More Details

# KIWI 1910 3D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910x748x2082
Internal Dimensions (WxDxH) mm	1824x637x1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

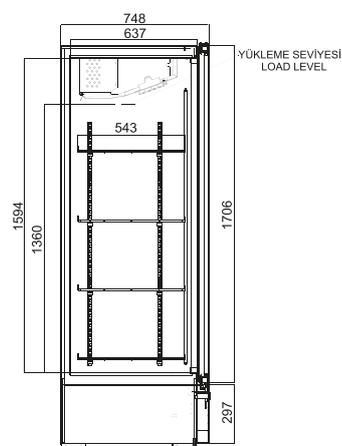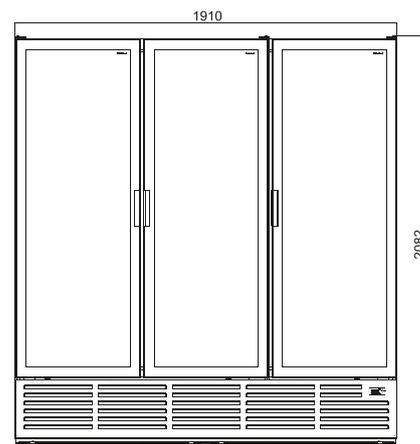

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD	RAL 9005	OPTIONAL
	RAL 9002	RAL 7043	OPTIONAL





Energy Class and  
For More Details

# KIWI 1910 4D



Capacity Gross / Net (L)	1850 L / 1630L
Outer Dimensions (WxDxH) mm	1910x748x2082
Internal Dimensions (WxDxH) mm	1824x637x1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

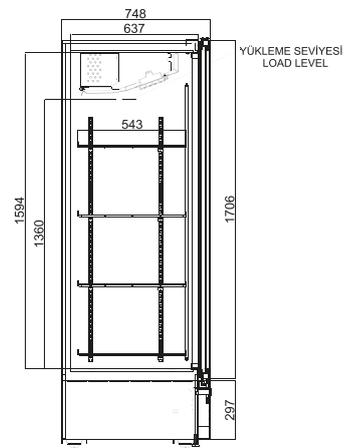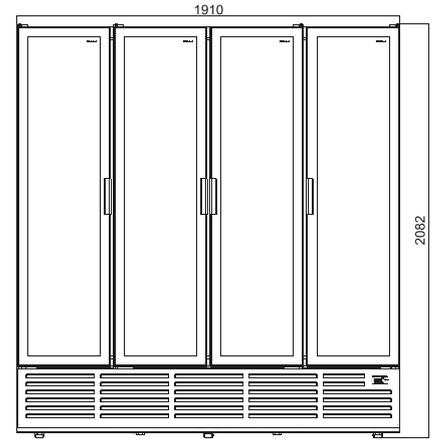

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9002	9002	9005	7043
PAL	PAL	PAL	PAL





Energy Class and  
For More Details

# KIWI NT 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666 x 804 x 2082 mm
Internal Dimensions (WxDxH) mm	544 x 637 x 1594 mm
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42/ 51

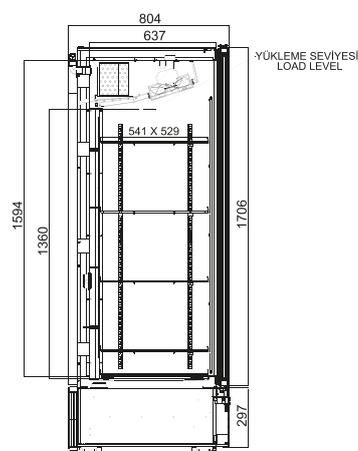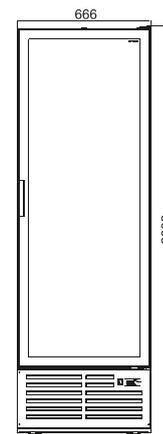

Inner Body	Outer Body	Outer Body	Outer Body
9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL

## Options

- Door lock
- Branding
- Castor
- Lighting from door





Energy Class and  
For More Details

# KIWI NT 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082 mm
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594 mm
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 x4 / PE coated
Adjustable Feet / Roller	2x adjustable feet +4x Roller
20DC/40DC-HC/Truck	11 / 22 / 26

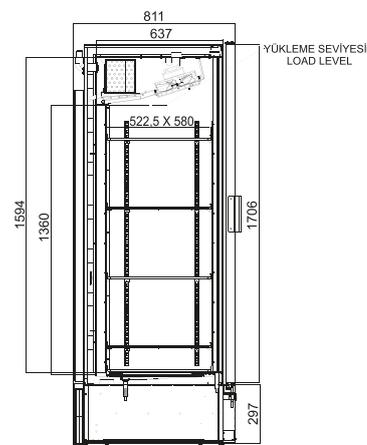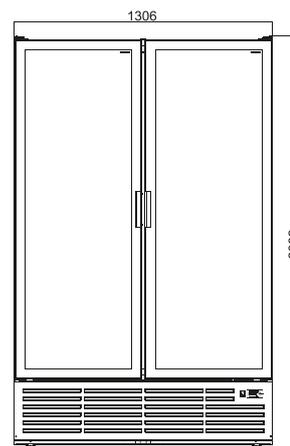

## Options

- Door lock
- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
9002	9002	9005	7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL
PAL	PAL	PAL	PAL





Energy Class and  
For More Details

# KIWI NT 1960 3D



Capacity Gross / Net (L)	1875 / 1750 L
Outer Dimensions (WxDxH) mm	1966 X 804 X 2082
Internal Dimensions (WxDxH) mm	1844 X 637 X 1594
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple tempered
Door Frame	Al Frame & Frameless
Int. & Ext. Body	Galvanised 0,5 mm Sheet Metal
Cooling System	Dynamic
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free + Maintenance Free
Lighting	Vertical + Horizontal
Self Closing Door	Yes
Insulation	61 mm
Shelves	Base + 4, Metal Shelves
Adjustable Feet / Roller	3x adjustable leg + 6x rollers
20 DC/40DC-HC/Truck	6 / 13 / 15

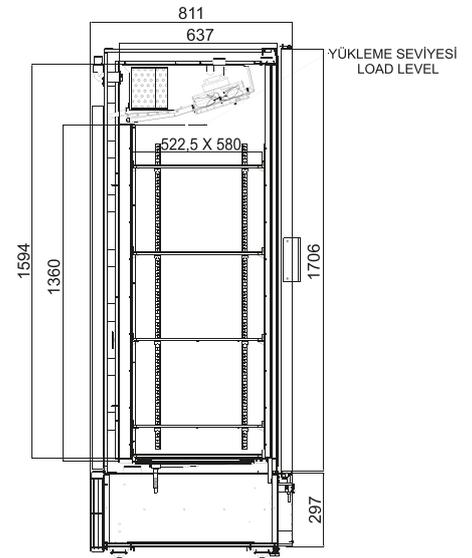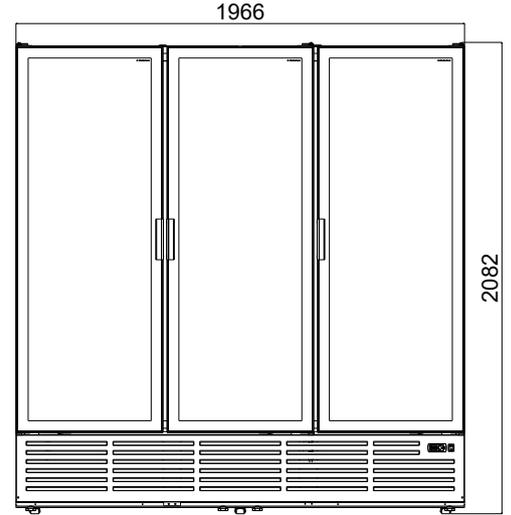

## Options

- Door lock
- Castor
- Branding
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD	RAL 9005	OPTIONAL
RAL 9002	STANDARD	RAL 7043	OPTIONAL



Energy Class and  
For More Details



*CREATES A PERFECT DISPLAY POINT  
BY HIGHLIGHTING  
THE PRODUCTS WITH  
THE FLAWLESS  
AESTHETIC DESIGN*

**KIWI SERIES**



# KIWI M&D



*Series*



- ◀ *It provides a quality view with ergonomic door handle.*
- ◀ *Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.*
- ◀ *This series, developed for supermarkets, achieves 3MO operating conditions using an evaporator with automatic defrost, and with NT version Kiwi M&D series offer full range as chiller & freezer cabinets.*
- ◀ *Low energy consumption thanks to hot gas defrost system.*
- ◀ *It looks like a single cabinet by positioning side by side.*
- ◀ *It is suitable for various placement combinations with its different sizes for both chiller and freezer versions.*

*Real Butchers*  
IN THE HOUSE

110 YEARS  
OF  
EXPERIENCE





DESIGN CREATED BY COMBINING  
DURABLENESS AND AESTHETIC  
KIWI MD



# KIWI M&D 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	630x795x2082
Internal Dimensions (WxDxH) mm	544x637x1594
Temperature Range (°C)	0°C/+2°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminim sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	26 / 46 / 56

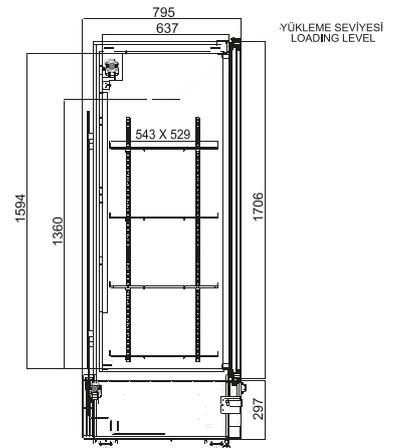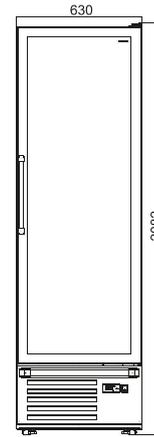

## Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
9002	7043	9005	9005	9002
STANDARD	RAL	OPTIONAL	RAL	OPTIONAL





Energy Class and  
For More Details

# KIWI M&D 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805X748X2082
Internal Dimensions (WxDxH) mm	719X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminum sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

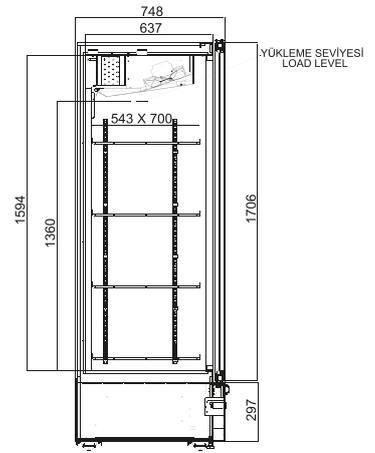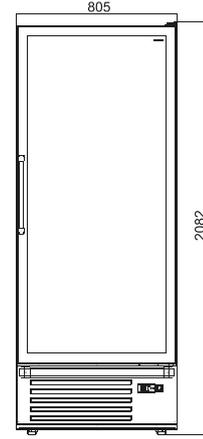

## Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL
9002	7043	9005	9005	9002
RAL	RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# KIWI M&D 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270X748X2082
Internal Dimensions (WxDxH) mm	1184X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

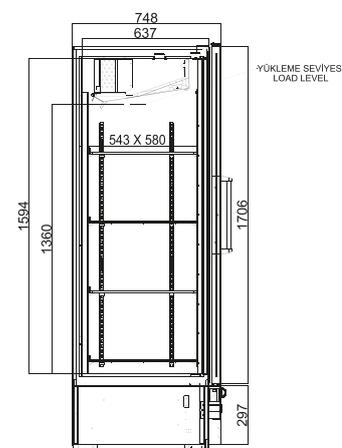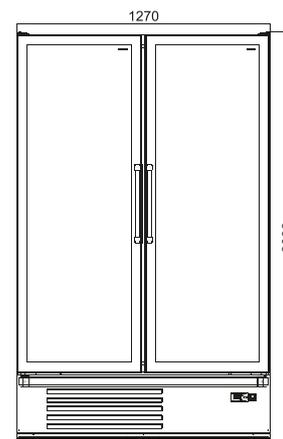

## Options

- Branding
- Castor
- Lighting from door

Inner Body RAL 9002	Outer Body STANDARD RAL 7043	Inner Body RAL 9005	Outer Body OPTIONAL RAL 9005	Outer Body OPTIONAL RAL 9002
---------------------------	---------------------------------------	---------------------------	---------------------------------------	---------------------------------------





Energy Class and  
For More Details

# KIWI M&D 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

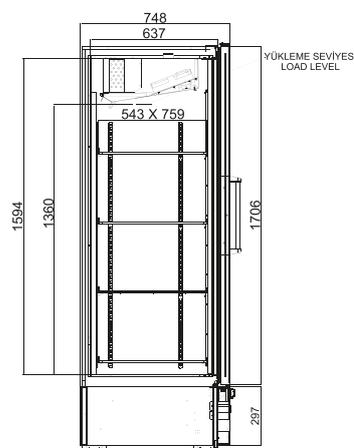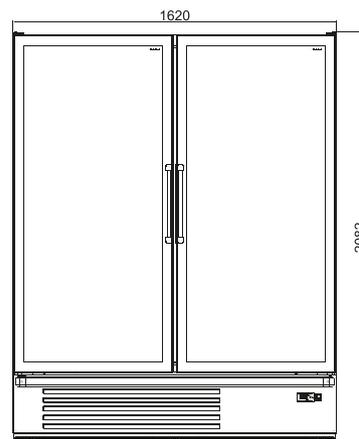

## Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
STANDARD	RAL	STANDARD	OPTIONAL	OPTIONAL
9002	7043	9005	9005	9002





Energy Class and  
For More Details

# KIWI M&D 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620X748X2082
Internal Dimensions (WxDxH) mm	1534X637X1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

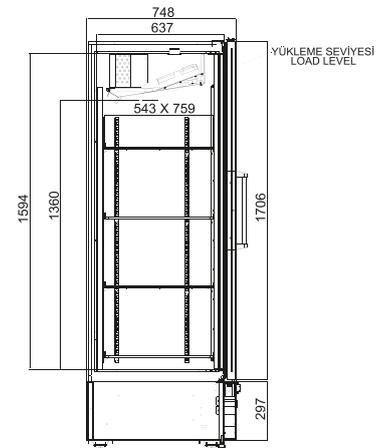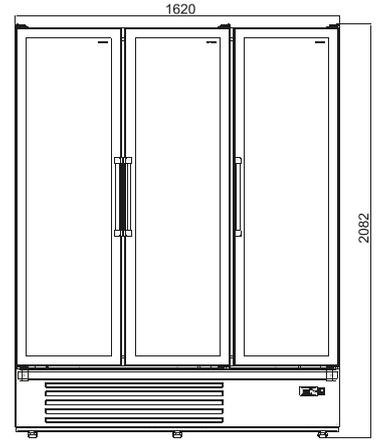

## Options

- Branding
- Castor
- Lighting from door

Inner Body RAL 9002 STANDARD	Outer Body RAL 7043 STANDARD	Inner Body RAL 9005 OPTIONAL	Outer Body RAL 9005 OPTIONAL	Outer Body RAL 9002 OPTIONAL
---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------





Energy Class and  
For More Details

# KIWI M&D 1910 3D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910X748X2082
Internal Dimensions (WxDxH) mm	1824 X 637 X 1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 + 4 + 4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

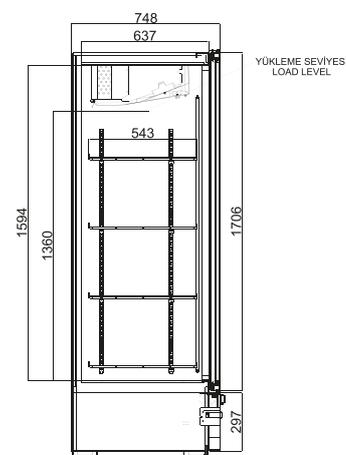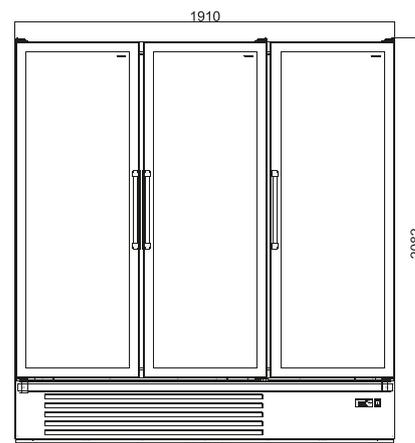

## Options

- Branding
- Castor
- Lighting from door

Inner Body RAL 9002 STANDARD	Outer Body RAL 7043 STANDARD	Inner Body RAL 9005 OPTIONAL	Outer Body RAL 9005 OPTIONAL	Outer Body RAL 9002 OPTIONAL
---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------





Energy Class and  
For More Details

# KIWI M&D 1910 4D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910x748x2082
Internal Dimensions (WxDxH) mm	1824x637x1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet +6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

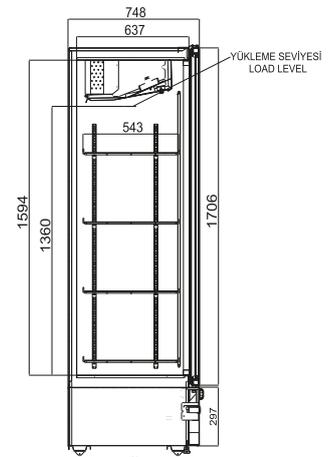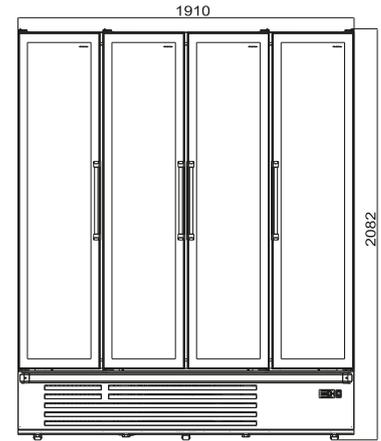

## Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
9002	7043	9005	9005	9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL
RAL	RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# KIWI NT M&D 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666X804X2082
Internal Dimensions (WxDxH) mm	544X637X1594
Temperature Range (°C)	-18°C/-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 51

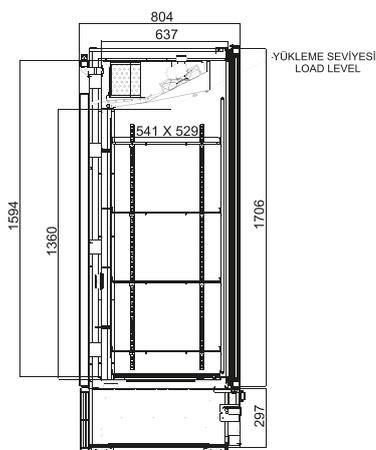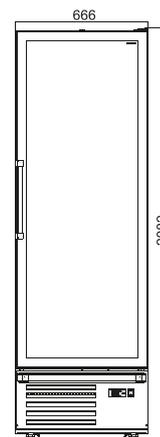

## Options

- Branding
- Castor
- Lighting from door

Inner Body RAL 9002	Outer Body STANDARD RAL 7043	Inner Body OPTIONAL RAL 9005	Outer Body OPTIONAL RAL 9005	Outer Body OPTIONAL RAL 9002
---------------------------	---------------------------------------	---------------------------------------	---------------------------------------	---------------------------------------





Energy Class and  
For More Details

# KIWI NT M&D 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082 mm
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594 mm
Temperature Range (°C)	-18°C / -23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4+4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 22 / 22 / 26

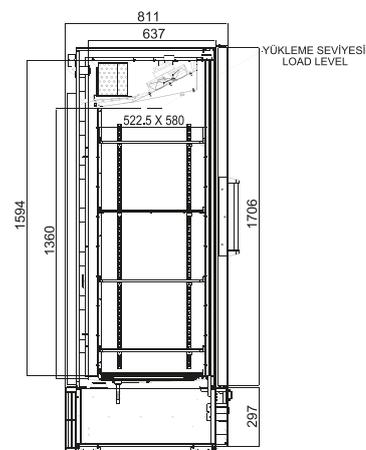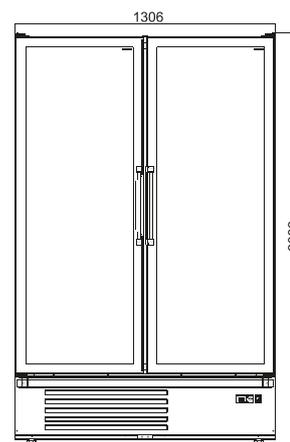

## Options

- Branding
- Castor
- Lighting from door



Inner Body RAL 9002	Outer Body RAL 7043	Inner Body RAL 9005	Outer Body RAL 9005	Outer Body RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL



Energy Class and  
For More Details

# KIWI NT M&D 1960 3D

Capacity Gross / Net (L)	1875 / 1750 L
Outer Dimensions (WxDxH) mm	1966 X 804 X 2082
Internal Dimensions (WxDxH) mm	1844 X 637 X 1594
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple tempered
Door Frame	Al Frame & Frameless
Int. & Ext. Body	Galvanised 0,5 mm Sheet Metal
Cooling System	Dynamic
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free + Maintenance Free
Lighting	Vertical + Horizontal
Self Closing Door	Yes
Insulation	61 mm
Shelves	Base + 4, Metal Shelves
Adjustable Feet / Roller	3x adjustable leg + 6x rollers
20 DC/40DC-HC/Truck	6 / 13 / 15

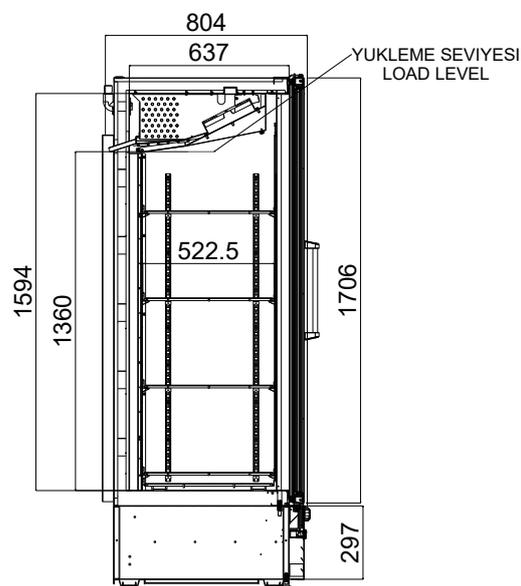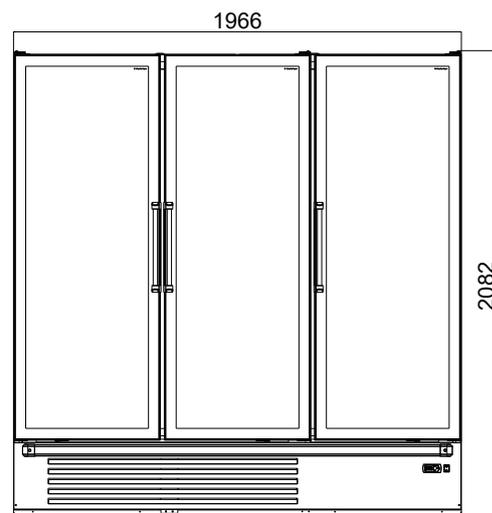

## Options

- Branding
- Castor
- Lighting from door

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	STANDARD RAL 9002	STANDARD RAL 9005	OPTIONAL RAL 7043
			OPTIONAL



Energy Class and  
For More Details



AVAILABLE IN  
1/2&3 DOOR  
VERSION

FRAMELESS DESIGN

LARGE  
INTERNAL  
VOLUME

LED  
LIGHTING

ENERGY  
EFFICIENT





# KIWI PREMIUM



*Series*



- ◀ ***It provides a quality view with all size handle and special design front grill.***
- ◀ ***Both food and beverage can be kept by operating in 3M1 and 3M2 conditions, or frozen food by NT version.***
- ◀ ***It offers many options that can be turned into a customized product such as chrome-plated handle, led-lighting front grill, door lighting.***
- ◀ ***It looks like a single cabinet by positioning side by side.***
- ◀ ***It is suitable for various placement combinations with its different sizes for both chiller and freezer versions.***







**KIWI PREMIUM SERIES**  
OFFERING THE OPTIONS OF  
**CUSTOMIZED DESIGN AND**  
**PREMIUM QUALITY**

# KIWI PREMIUM 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	630 x 795 x 2082
Internal Dimensions (WxDxH) mm	544 x 637 x 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	26 / 46 / 56

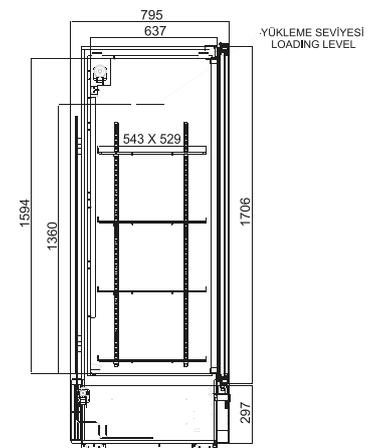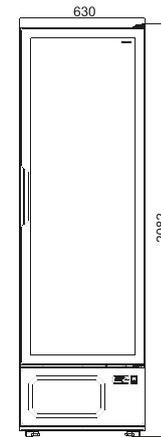

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL 9005	RAL 9005	RAL 9002	RAL 7042





Energy Class and  
For More Details

# KIWI PREMIUM 805



Capacity Gross / Net (L)	730 L / 680 L
Outer Dimensions (WxDxH) mm	805 X 748 X 2082
Internal Dimensions (WxDxH) mm	719 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	21 / 42 / 48

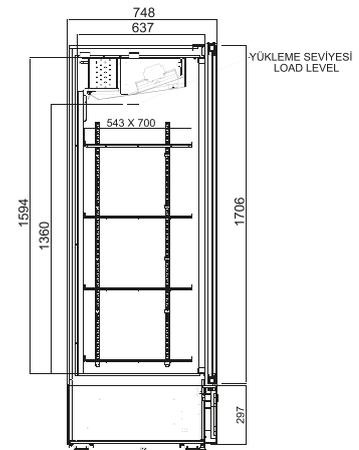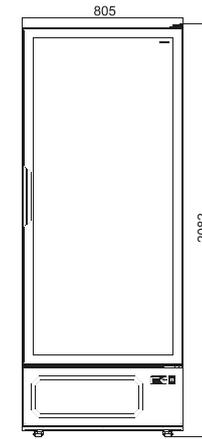

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL 9005	RAL 9005	RAL 9002	RAL 7042





Energy Class and  
For More Details

# KIWI PREMIUM 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270 X 748 X 2082
Internal Dimensions (WxDxH) mm	1184 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

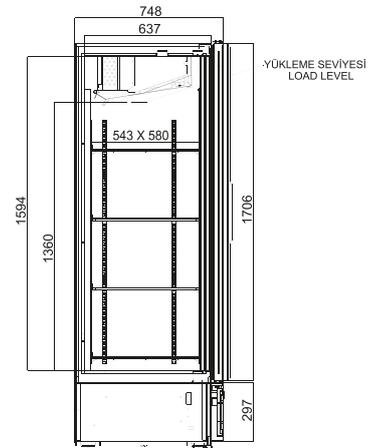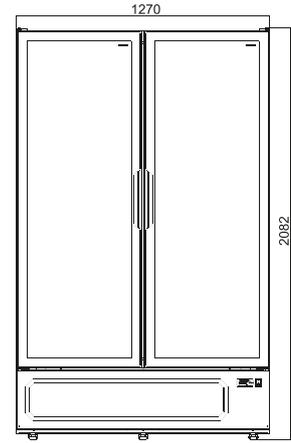

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9005	9005	9002	7042
PAL	PAL	PAL	PAL



Energy Class and  
For More Details

# KIWI PREMIUM 1620 2D

Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620 X 748 X 2082
Internal Dimensions (WxDxH) mm	1534 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

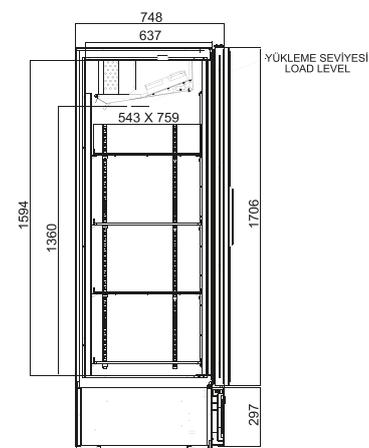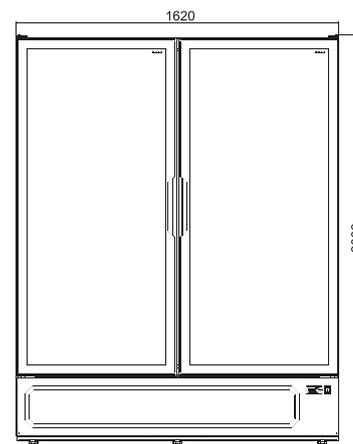

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	RAL 9005	STANDARD	OPTIONAL
RAL 9005	RAL 7042	RAL 9002	OPTIONAL



Energy Class and  
For More Details

# KIWI PREMIUM 1620 3D

Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620 X 748 X 2082
Internal Dimensions (WxDxH) mm	1534 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

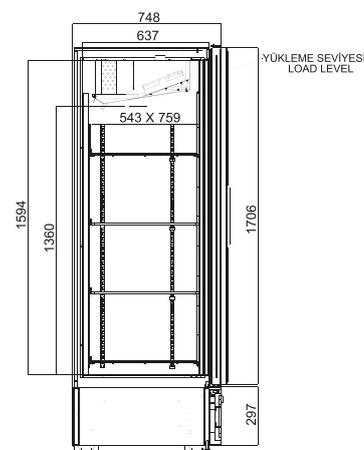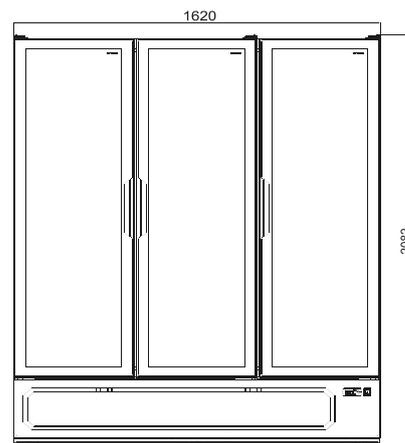

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL 9005	RAL 9005	RAL 9002	RAL 7042



Energy Class and  
For More Details

# KIWI PREMIUM 1910 3D

Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910 x 748 x 2082
Internal Dimensions (WxDxH) mm	1824 x 637 x 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

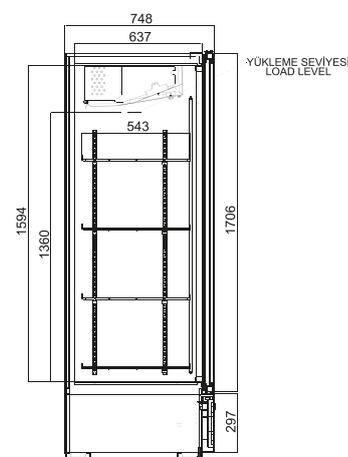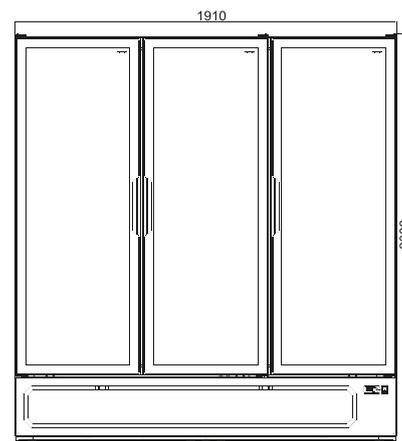

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9005	RAL 9005	9002	7042
RAL	RAL	RAL	RAL



Energy Class and  
For More Details

# KIWI PREMIUM 1910 4D

Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910 X 748 X 2082
Internal Dimensions (WxDxH) mm	1824 X 637 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

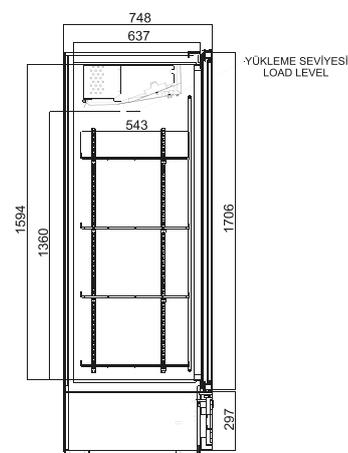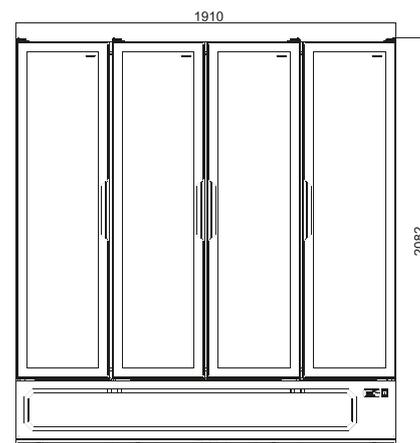

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Automatic defrost
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL 9005	RAL 9005	RAL 9002	RAL 7042





Energy Class and  
For More Details

# KIWI NT PREMIUM 660



Capacity Gross / Net (L)	548 L / 500 L
Outer Dimensions (WxDxH) mm	666 x 804 x 2082
Internal Dimensions (WxDxH) mm	544 X 637 X 1594
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type +Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4/ PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 51

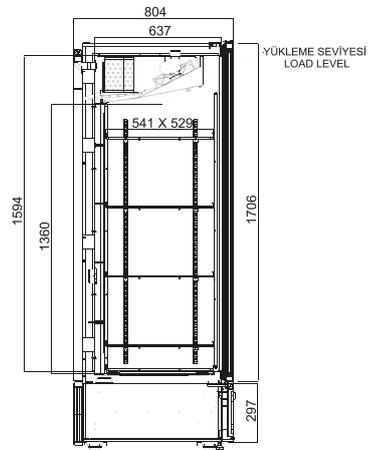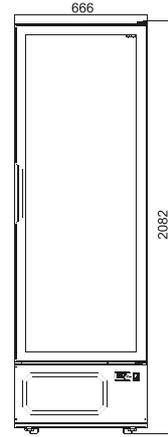

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
9005	9005	9002	7042
RAL	RAL	RAL	RAL





Energy Class and  
For More Details

# KIWI NT PREMIUM 1300



Capacity Gross / Net (L)	1210 L / 1115 L
Outer Dimensions (WxDxH) mm	1306 x 811 x 2082
Internal Dimensions (WxDxH) mm	1184 x 637 x 1594
Temperature Range (°C)	NT -18°C /-23°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple Tempered
Door Frame	FRAMELESS /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	61 mm
Shelves	4 + 4 / PE coated
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 22 / 26

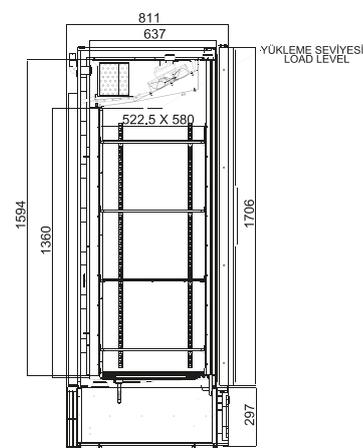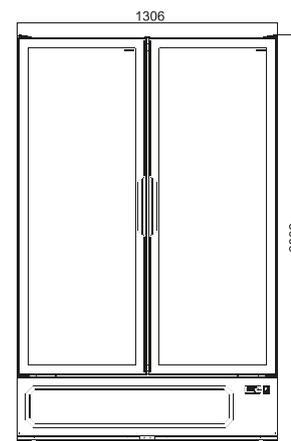

## Options

- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill



Inner Body	Outer Body	Inner Body	Outer Body
STANDARD	STANDARD	OPTIONAL	OPTIONAL
RAL 9005	RAL 9005	RAL 9002	RAL 7042



Energy Class and  
For More Details

# KIWI NT PREMIUM 1960

Capacity Gross / Net (L)	1875 / 1750 L
Outer Dimensions (WxDxH) mm	1966 X 804 X 2082
Internal Dimensions (WxDxH) mm	1844 X 637 X 1594
Temperature Range (°C)	NT -18°C / -23°C
Refrigerant/Voltage/Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Triple tempered
Door Frame	Al Frame & Frameless
Int. & Ext. Body	Galvanised 0,5 mm Sheet Metal
Cooling System	Dynamic
Evaporator Type	Fin Type + Auto Defrost
Condenser Type	Dust Free + Maintenance Free
Lighting	Vertical + Horizontal
Self Closing Door	Yes
Insulation	61 mm
Shelves	Base + 4, Metal Shelves
Adjustable Feet / Roller	3x adjustable leg + 6x rollers
20 DC/40DC-HC/Truck	6 / 13 / 15

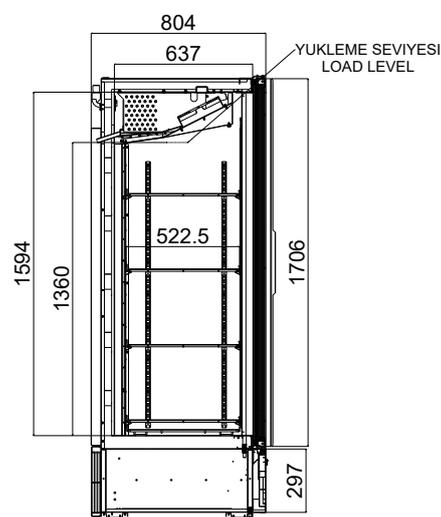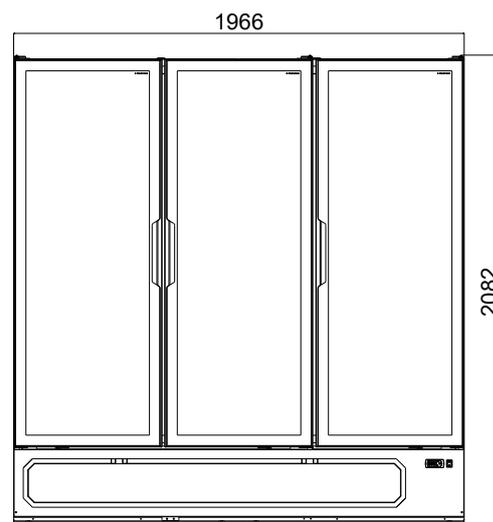

## Options


- Door lock
- Branding
- Castor
- Lighting from door
- Lighted front grill

Inner Body	Outer Body	Outer Body	Outer Body
RAL 9002	RAL 9002	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL	OPTIONAL



Energy Class and  
For More Details

# CUSTOM DESIGNS FOR YOU

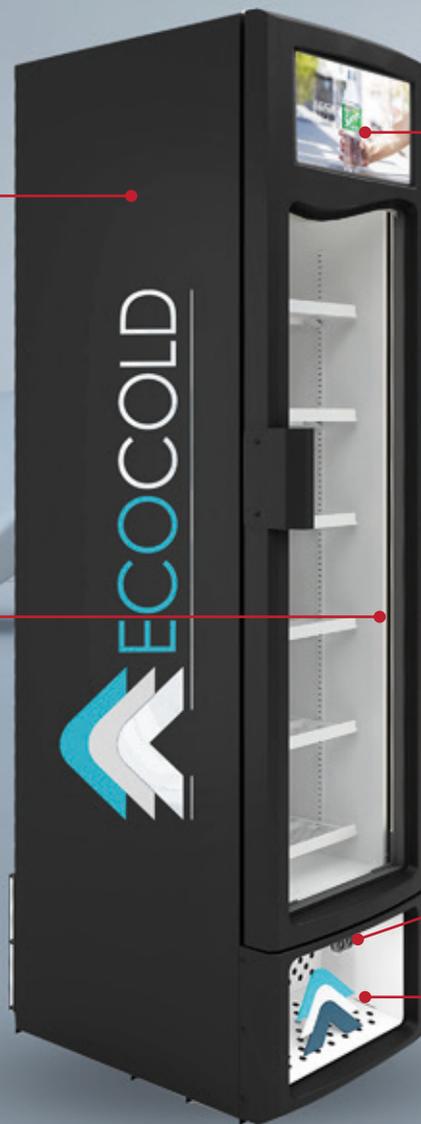

Advertising Area

Audio supported video display with LCD screen controlled by motion sensor

Multicolor led option fade effect and flashing effect controlled by motion sensor to attract customer's attention

Motion sensor & electronic card, customized algorithm

3D logo/product display area





# KIWI EDGE



*Series*



- ◀ It has a unique design with all appearance of glass.**
- ◀ The led lighting on the exterior door can be offered in different colours or RGB led red/green/blue can be used.**
- ◀ Led animation can be integrated thanks to addressable LED and specially developed electronic card.**
- ◀ Thanks to our special software, it increases the sales of the products by offering different light games by adding a motion sensor according to the customer's location.**
- ◀ It is suitable for various placement combinations with its different sizes.**




# KIWI EDGE SERIES WITH SUSTAINABLE INNOVATION AND UNIQUE DESIGN



# KIWI EDGE 630



Capacity Gross / Net (L)	550 L / 537 L
Outer Dimensions (WxDxH) mm	670 X 835 X 2140
Internal Dimensions (WxDxH) mm	544 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R600 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Plate On Tube Evaporator
Condenser Type	Dust free Wired Back Condenser
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4 / PE coated + price holder
Adjustable Feet / Roller	2x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	20 / 42 / 53

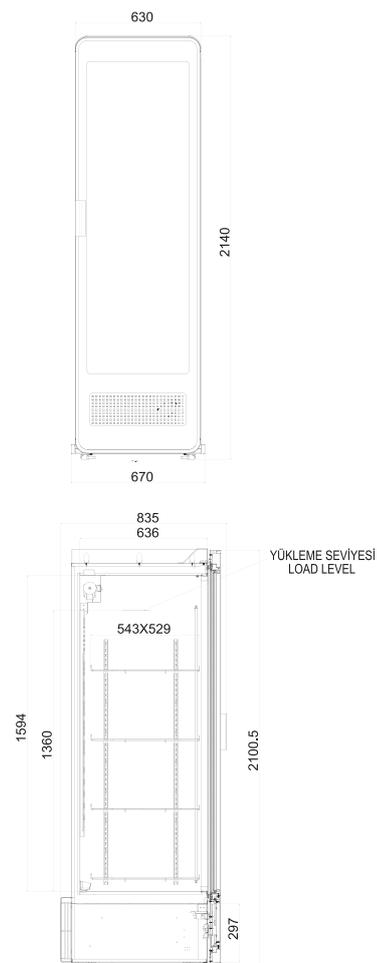

## Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
RAL 9005	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL




Energy Class and  
For More Details

# KIWI EDGE 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1310 X 786 X 2140
Internal Dimensions (WxDxH) mm	1184 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	11 / 23 / 25

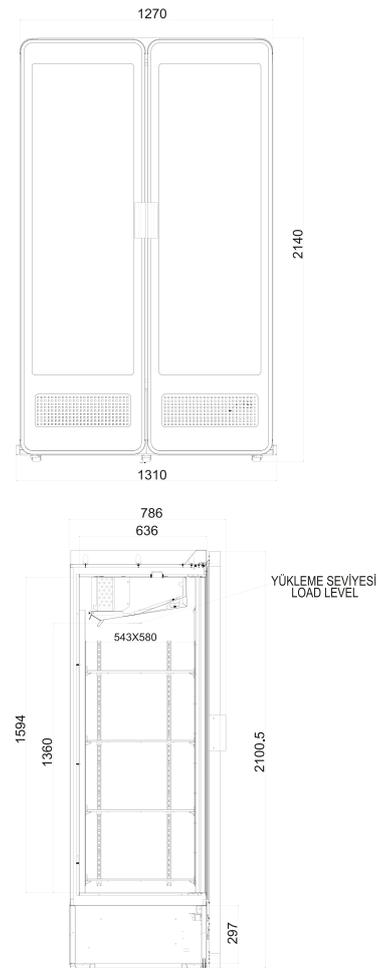

## Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
9005	9005	7043
STANDARD	STANDARD	OPTIONAL





Energy Class and  
For More Details

# KIWI EDGE 1620 3D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1660 X 786 X 2140
Internal Dimensions (WxDxH) mm	1534 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	full glass /aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lighting	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	7 / 14 / 16

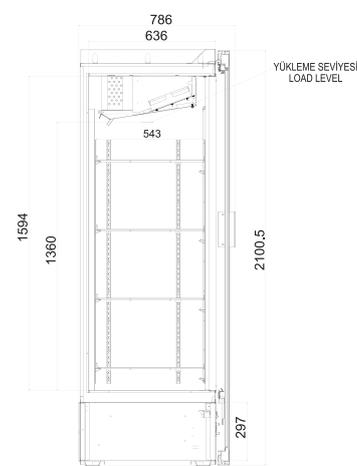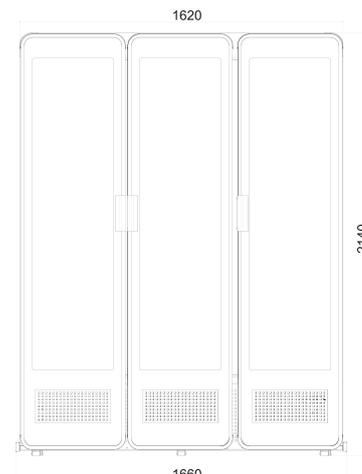

## Options

- Price label stock
- Extra shelves
- Branding
- Castor
- Multicolor / changeable outer led
- Motion Sensor, Customer tracking lighting animation
- Outer led Flow Effect animation

Inner Body	Outer Body	Outer Body
RAL 9005	RAL 9005	RAL 7043
STANDARD	STANDARD	OPTIONAL






Energy Class and  
For More Details



*THE SERIE THAT ESTABLISHES  
INTERACTIVE  
CUSTOMER COMMUNICATION  
WITH ITS UNIQUE DESIGN*  
**KIWI EDGE SERIES**

# OPTIONS

## Middle Support Led

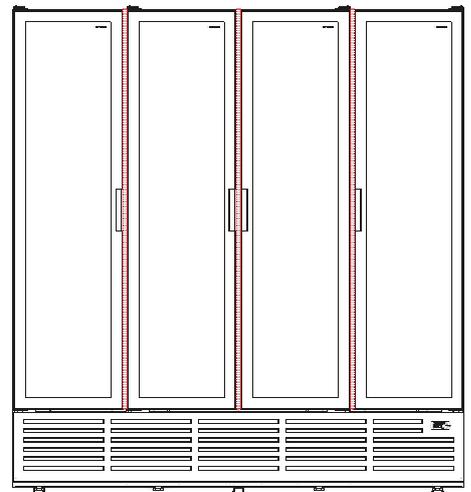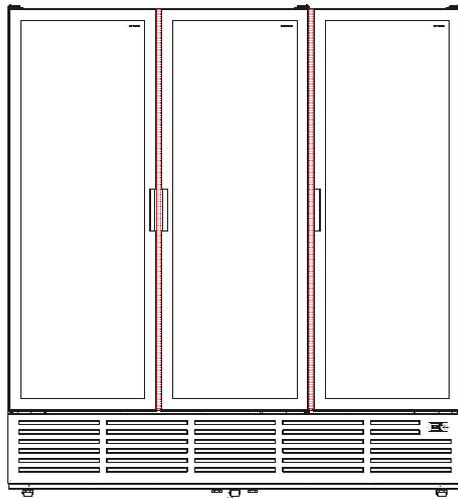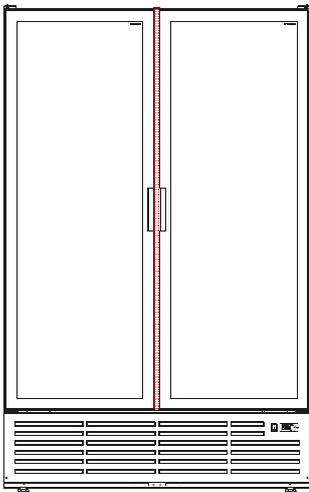

## Upper Canopys



## Kiwi Edge RGB Option & Motion Sensor Option



Motion Sensor Option



Buttons for changing door  
leads to 7 different colours

### Castor Option



### Roller




### Castors



### Lighting from door



### Metal Shelves for positive cabinets

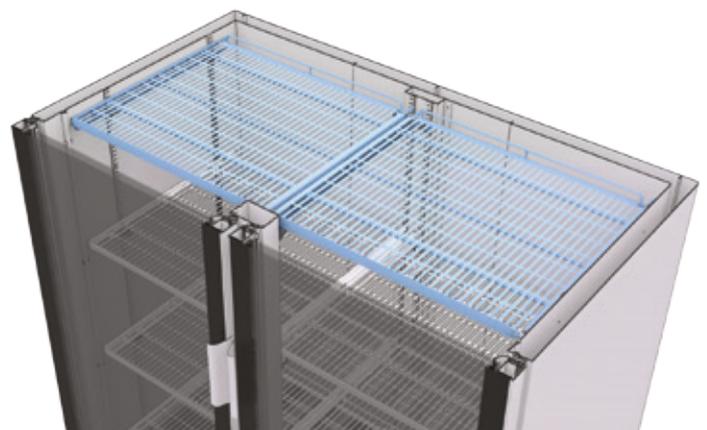







**Manisa Address:**

Keçiliköy OSB Mah. Ekrem Elginkan Cad.  
No:5 Yunusemre / MANİSA

+90 236 213 09 77

info@ecocold.com.tr

@38.6213131 - 27.3291204

 [www.ecocold.com.tr](http://www.ecocold.com.tr)



ECOCOLD